

CST
TIRES




MOTORCYCLE TIRES

2024-25



CONTENTS

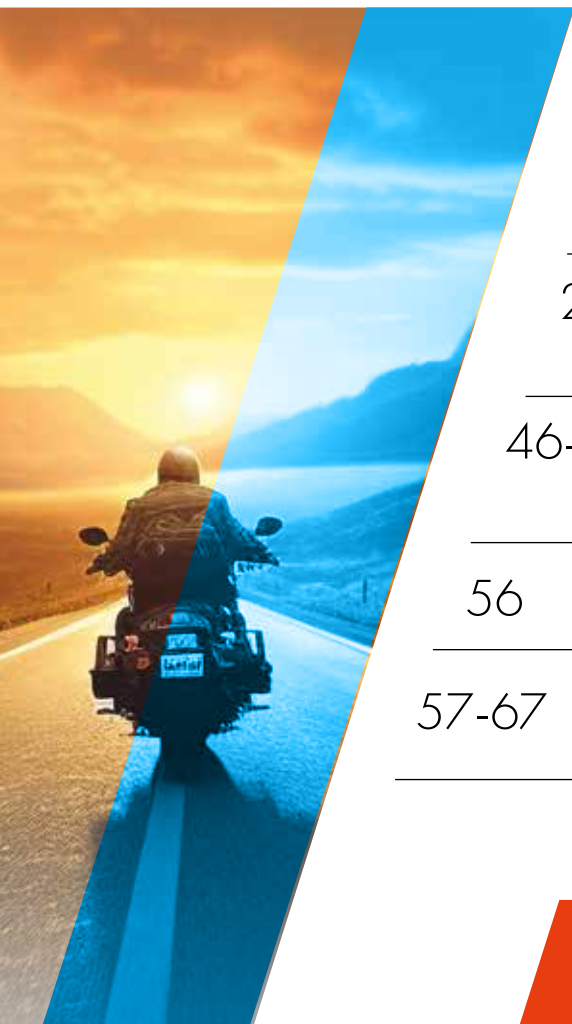

4-17 MOTO SCOOTER

18-27 MOTO ADVENTURE
• Adventure Radial • Classic Trail • Trail Bike

28-45 MOTO STREET
• Racing • Sports Touring Radial • Classic Street

46-55 MOTO OFF-ROAD
• MX • Sand • Enduro

56 SAFETY INFORMATION

57-67 TIRES INDEX

R&D CENTER - YUANLIN, TAIWAN



TECHNOLOGY CENTER - UNITED STATES



COMPANY PROFILE

CST was founded in 1989 by Cheng Shin Rubber (Xiamen) Ind. Co. Ltd. The Cheng Shin Tire Group is the top tire manufacturer in China and one of the largest tire manufacturers in the world, with products distributed in more than 150 countries.

CST covers a wide range of market segments. CST products include tires and tubes for passenger, truck and bus, bicycle, motorcycle, ATV, forklift, agricultural, and lawn and garden equipment.

The company's new factory in Xiamen, China, which produces passenger radial and light truck radial tires, brings CST's tire development and manufacturing to a world-class level. This state-of-the-art facility employs innovative technology and advanced equipment from Germany, Italy, Holland, Japan and Taiwan.

Adhering to the most stringent international standards, CST has attained certificates and awards including DOT (US Department of Transportation) certification, ISO9001, E-Mark and TS 16949.

With a first-rate manufacturing operation and highly efficient logistics, CST sets the standard for excellence in the tire industry. At CST, quality, integrity and service are more than just words: They're the foundation of the company from top management to the factory floor and beyond.



XIAMEN, CHINA



R&D CENTER - SHANGHAI, CHINA



TECHNOLOGY CENTER - EUROPE



CULTURE CENTER







MOTO SCOOTER

CM-SC01



SCOOTER SPORTS

- High-performance semi-racing tire, a perfect match with big scooters, offering ultimate handling and sense of security
- Brand new profile optimises tire camber to provide better handling, traction and cornering stability
- Innovative blade-shape groove delivers better drainage and anti-sideslip for excellent stability
- Optimised compound for improved grip and durability



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	100/90-10	2.50 x 10	56J	TL	434/17.1	101/4.0
	90/90-12	2.15 x 12	44J	TL	467/18.4	90/3.5
	100/90-12	2.50 x 12	59J	TL	485/19.1	101/4.0
	110/90-12	2.50 x 12	64J	TL	503/19.8	109/4.3
	110/70-12	3.00 x 12	47P	TL	459/18.1	110/4.3
	120/70-12	3.50 x 12	58P	TL	473/18.6	122/4.8
	130/70-12	3.50 x 12	62P	TL	487/19.2	129/5.1
	110/70-13	3.00 x 13	48P	TL	484/19.1	110/4.3
	130/70-13	3.50 x 13	63P	TL	512/20.2	129/5.1
	70/90-14	1.60 x 14	34P	TL	482/19.0	69/2.7
	80/80-14	1.85 x 14	43S	TL	484/19.1	80/3.1
	80/90-14	1.85 x 14	46P	TL	500/19.7	80/3.1
	90/80-14	2.15 x 14	43P	TL	500/19.7	90/3.5
	90/90-14	2.15 x 14	46P	TL	518/20.4	90/3.5
	100/90-14	2.50 x 14	57P	TL	536/21.1	101/4.0
	100/80-14	2.50 x 14	48P	TL	516/20.3	101/4.0
	110/80-14	2.50 x 14	59S	TL	532/20.9	109/4.3
	120/80-14	2.75 x 14	58S	TL	548/21.6	119/4.7
	100/80-16	2.50 x 16	50P	TL	566/22.3	101/4.0
	120/80-16	2.75 x 16	60P	TL	600/23.6	119/4.7
	110/70-14	3.00 x 14	50P	TL	513/20.2	110/4.3
	120/70-13	3.50 x 13	59S	TL	500/19.7	122/4.8
	120/70-15	3.50 x 15	56S	TL	549/21.6	122/4.8
	150/70-13	4.25 x 13	64S	TL	540/21.3	151/5.9
	120/70-14	3.50 x 14	55P	TL	524/20.6	122/4.8
	140/70-14	3.75 x 14	68S	TL	555/21.9	139/5.5
	150/70-14	4.25 x 14	66S	TL	566/22.3	151/5.9
	130/60-13	3.50 x 13	53J	TL	486/19.1	129/5.1
	140/60-13	3.75 x 13	57P/63S	TL	498/19.6	139/5.5
	140/60-14	3.75 x 14	64P/64S	TL	525/20.7	139/5.5
F	120/70R15	3.50 x 15	56H	TL	549/21.6	122/4.8
R	160/60R15	4.50 x 15	67H	TL	573/22.6	161/6.3

CM-SC01

/HIGH-PERFORMANCE SEMI-RACING TIRE
/SUPERB TRACTION AND CORNERING
/IMPROVED GRIP



CST
TIRES

CM-SC12

SCOOTER WET GRIP



- Brand new pattern design, improving drainage performance with a larger contact patch
- Newly developed compound, offering better grip to provide an excellent riding experience when navigate the streets
- Brand new tire profile design, using high heat resistance and high stretch material combined with multi-layer construction that raises the speed index to "L"(120KM/H) and offers better stability
- Ideal for dry and wet days



	Tire Size	Rim Size	LSR/PR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	3.00-8	2.15 x8	8PR	TL	365/14.4	80/3.1
	2.75-10	1.75 x10	8PR	TL	400/15.7	71/2.8
	3.00-10	2.15 x10	8PR	TL	413/16.3	80/3.1
	3.50-10	2.50 x10	4PR	TL	437/17.2	92/3.6
	60/100-10	1.40 x10	8PR	TL	376/14.8	60/2.4
F	70/90-12	1.60 x12	41L	TL	431/17.0	69/2.7
	90/80-12	2.15 x12	8PR	TL	449/17.7	90/3.6
	90/90-12	2.15 x12	44L	TL	467/18.4	90/3.5
	110/70-12	3.00 x12	8PR	TL	459/18.1	110/4.3
	110/70-13	3.00 x13	48P	TL	484/19.1	110/4.3
R	80/80-12	1.85 x12	8PR	TL	435/17.1	80/3.1
	100/90-10	2.50 x10	8PR	TL	434/17.1	101/4.0
	120/70-12	3.50 x12	58L	TL	473/18.6	122/4.8
	130/70-12	3.50 x12	8PR	TL	487/19.2	129/5.1
	130/70-13	3.00 x13	63P	TL	512/20.2	129/5.1

CM-SC12

*/IMPROVED WATER DISPERSAL
/HIGH-SPEED STABILITY
/INCREDIBLE GRIP*



 **CST**
TIRES

csttires.com



CM547(S)



SCOOTER

- High void ratio of the pattern ensures riding stability and extends tire life
- Diamond knurl design provides excellent water dispersal and anti-slide characteristics
- Extensive grooves and thin slits further improve efficient water dispersal and deliver outstanding grip on wet roads



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	3.50-10	2.50 x10	59J/59P	TL	437/17.2	92/3.6
	90/90-10(Y)	2.15 x10	55J	TL	416/16.4	90 /3.5
	100/80-10	2.50 x10	58P	TL	414/16.3	101/4.0
	100/90-10	2.50 x10	61J	TL	430/16.9	101/4.0
	110/70-12	3.00 x12	56J	TL	459/18.1	110/4.3
	120/70-10	3.50 x10	54M	TL	422/16.6	122/4.8
	130/70-12	3.50 x12	56L/62S	TL	487/19.2	129/5.1
	120/70-12	3.50 x12	51L/58S	TL	473/18.6	122/4.8
	130/70-10	3.50 x10	62M	TL	431/17.0	129/5.1
	110/70-11(K)	3.00 x11	45L	TL	433/17.0	110/4.3
	120/70-11	3.50 x11	56L	TL	447/17.6	122/4.8
	110/80-12	2.50 x12	61L	TL	481/18.9	109/4.3
	110/70-13	2.50 x11	48P	TL	484/19.1	122/4.8
	110/90-13	2.50 x13	56P	TL	528/20.8	109/4.3
	130/70-13	3.50 x13	63P	TL	512/20.2	129/5.1
	130/60-13	3.50 x13	60S	TL	490/19.3	124/4.9
	140/70-13	3.75 x13	61S	TL	530/20.9	139/5.5
	100/90-14	2.50 x14	57P	TL	536/21.1	101/4.0
	90/80-14	2.15 x14	43P	TL	501/19.7	90/3.5
	110/80-14	2.50 x14	59S	TL	532/21.0	109/4.3
	150/70-14	4.25 x14	66S	TL	566/22.3	151/5.9
	90/80-16	2.15 x16	51S	TL	547/21.6	90/3.5
	90/90-16	2.15 x16	48H	TL	568/22.4	90/3.5
	100/80-16	2.50 x16	56S	TL	567/22.4	102/4.0
110/70-16	3.00 x16	52S	TL	559/22.1	110/4.3	
130/70-16	3.50 x16	61S	TL	588/23.1	129/5.1	
120/80-16	2.75 x16	60S	TL	598/23.6	119/4.7	
140/70-16	3.75 x16	65S	TL	602/23.8	139/5.5	

CM576/CM577

SCOOTER



- High land ratio in the central tread area ensures excellent handling stability and mileage performance
- Multi-sipe arrangement deliver outstanding grip in the wet



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/90-12	2.15 x12	44J	TL	467/18.4	90/3.5
	120/70-13	3.50 x13	59S	TL	498/19.6	122/4.8
	110/70-16	3.00 x16	52P	TL	560/22.0	110/4.3
	110/80-14	2.50 x14	53P	TL	532/20.9	109/4.3
	120/70-15	3.50 x15	56S	TL	549/21.6	122/4.8
	120/80-14	2.75 x14	58S	TL	548/21.6	119/4.7
R	100/90-10	2.50 x10	56J	TL	430/16.9	101/4.0
	120/80-12	2.75 x12	65S	TL	497/19.6	119/4.7
	110/80-14	2.50 x14	59P	TL	532/20.9	109/4.3
	120/70-14	3.50 x14	61P	TL	524/20.6	122/4.8
	130/70-14	3.50 x14	61P	TL	533/21.0	124/4.9
	140/70-14	3.75 x14	68S	TL	552/21.7	139/5.5
	150/70-14	4.25 x14	66S	TL	566/22.3	151/5.9





CM-SC02

SCOOTER



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	3.50-10	2.50 x10	51P	TL	437/17.2	92/3.6
	90/90-10	2.15 x10	50P	TL	416/16.4	90/3.5
	100/90-10	2.50 x10	56P	TL	434/17.1	101/4.0
	90/90-12	2.15 x12	54P	TL	467/18.4	90/3.5
	110/70-12	3.00 x12	47P	TL	459/18.1	110/4.3
	120/70-12	3.50 x12	51P	TL	473/18.6	122/4.8
	130/70-12	3.50 x12	56P	TL	487/19.2	129/5.1



CM-SC07

SCOOTER



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	110/70-12	3.00 x12	47P	TL	459/18.1	110/4.3
	120/70-12	3.50 x12	51P	TL	473/18.6	122/4.8
	130/70-12	3.50 x12	56P	TL	487/19.2	129/5.1



CM-TR

SCOOTER



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	3.50-10	2.50 x10	51P	TL	434/17.1	92/3.6
	90/90-10	2.15 x10	50P	TL	416/16.4	90/3.5
	100/90-10	2.50 x10	56P	TL	437/17.2	101/4.0
	90/90-12	2.15 x12	54P	TL	467/18.4	90/3.5
	120/70-12	3.50 x12	51P	TL	470/18.5	122/4.8
	130/70-12	3.50 x12	56P	TL	485/19.1	129/5.1
	110/70-13	3.00 x13	54L	TL	486/19.1	110/4.3
	120/70-13	3.50 x13	62P	TL	498/19.6	122/4.8
	130/70-13	3.50 x13	63P	TL	512/20.2	129/5.1
	110/80-14	2.50 x14	53P	TL	532/20.9	109/4.3
	140/70-14	3.75 x14	68P	TL	552/21.7	139/5.5



CM502

SCOOTER



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
R	3.00-10	2.15 x10	42J	TL	413/16.3	80/3.1
	3.50-10	2.50 x10	51J	TL	437/17.2	92/3.6
	90/90-12	2.15 x12	54J	TL	467/18.4	90/3.5
	120/70-12	3.50 x12	51J	TL	473/18.6	119/4.7
	130/70-12	3.50 x12	56J	TL	487/19.2	127/5.0
		130/60-13	3.50 x13	53J	TL	486/19.1



CM519

SCOOTER



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	120/70-10	3.50 x10	54L	TL	422/16.6	122/4.8
	120/80-10	2.75 x10	62L	TL	446/17.6	119/4.7
	110/70-11	3.00 x11	45L	TL	433/17.0	110/4.3
	120/70-11	3.50 x11	50L / 56L	TL	451/17.8	122/4.8
	120/70-12	3.50 x12	51J	TL	473/18.6	122/4.3
	130/70-12	3.50 x12	56J	TL	487/19.2	129/5.1
	130/60-13	3.50 x13	53J	TL	486/19.1	129/5.1
	2.50-17	1.60 x17	4PR	TT/TL	570/22.4	65/2.6
	2.75-17	1.85 x17	4PR	TT/TL	588/23.1	75/3.0
	3.00-18	1.85 x18	4PR	TT	627/24.7	80/3.1
	4.10-18	2.15 x18	4PR	TT/TL	651/25.6	104/4.1
	110/90-16	2.50 x16	59P	TL	607/23.9	109/4.3
	2.75-21	1.85 x21	45P	TL	689/27.1	75/3.0



CM568

SCOOTER



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	3.00-10	2.15 x10	4/6/8PR	TL	413/16.3	80/3.1
	3.50-10	2.50 x10	4PR	TL	437/17.2	92/3.6
	80/100-10	1.85 x10	46C/52C	TL	414/16.3	80/3.1
	90/90-12	2.15 x12	44J	TL	467/18.4	90/3.5
	100/90-10	2.50 x10	56J	TL	434/17.1	101/4.0
	90/90-10	2.15 x10	50J	TL	416/16.4	90/3.5



C6011

SCOOTER



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	3.00-10	2.15 x10	6PR	TL	409/16.1	80/3.1
	3.50-10	2.50 x10	4/6/8 PR	TL	437/17.2	96/3.8
	4.00-10	2.50 x10	4PR	TT	466/18.3	105/4.1
	110/90-10	2.50 x10	61J/66J	TL	452/17.8	109/4.3
	120/90-10	2.75 x10	66J	TL	470/18.5	115/4.5
	130/90-10	3.00 x10	70J	TL	488/19.2	129/5.1
	3.50-12	2.50 x12	4/6 PR	TT/TL	488/19.2	97/3.8
	3.75-12	2.15 x12	4/6 PR	TT	505/19.9	100/3.9
	4.00-12	2.50 x12	4/6 PR	TT/TL	518/20.4	108/4.3
	110/90-12	2.50 x12	64J/64M/ 69P	TL	510/20.1	109/4.3
R	150/80-15(R)	3.50 x15	76H	TL	621/24.4	151/5.9
	90/90-16	2.15 x16	48H	TL	568/22.4	90/3.5
	110/90-16	2.50 x16	59P/59S/ 59H/59V	TT/TL	604/23.8	109/4.3
	120/90-16	2.75 x16	63H	TL	622/24.5	127/5.0
	130/80-16	3.00 x16	64P	TL	614/24.2	129/5.1
	160/80-16	4.00 x16	81H	TL	662/26.1	162/6.4
	130/70-17	3.50 x17	62H	TL	624/24.6	129/5.1
	90/90-18	2.15 x18	51H/51P	TL	619/24.4	90/3.5
	130/70-18	3.50 x18	63H	TL	645/25.4	129/5.1
	140/70-18	3.75 x18	67H	TL	661/26.0	139/5.5
	80/90-21	1.85 x21	48H	TL	677/26.7	80/3.1
	90/90-21	2.15 x21	54H	TL	695/27.4	92/3.6



C6525F C6525

SCOOTER



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	110/90-13	2.50 x13	56P	TL	528/20.8	109/4.3
	120/70-13	3.50 x13	53P/62P	TL	498/19.6	122/4.8
	120/80-14(S)	2.75 x14	58S	TL	548/21.6	119/4.7
R	90/70-12	2.50 x12	37J/43J	TL	430/16.9	90/3.5
	110/90-12	2.50 x12	64P	TL	505/19.9	109/4.3
	110/70-13	3.00 x13	55L	TL	484/19.1	110/4.3
	130/70 -12	3.50 x12	62P	TL	487/19.2	129/5.1
	130/70-13	3.50 x13	63P	TL	512/20.2	129/5.1
	150/70-13	4.25 x13	64S	TL	540/21.3	151/5.9
	120/80-14	2.75 x14	58S	TL	548/21.6	119/4.7





C6528F C6528

SCOOTER



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	3.50-10	2.50 x10	59J	TL	434/17.1	92/3.6
	110/70-12	3.00 x12	53L	TL	459/18.1	110/4.3
	110/80-14	2.50 x14	53P	TL	532/20.9	109/4.3
	120/70-16	3.50 x16	57S	TL	574/22.6	122/4.8
R	80/90-15	1.85 x15	51J	TL	528/20.8	80/3.1
	90/90-10	2.15 x10	55J	TL	416/16.4	90/3.5
	100/90-10	2.50 x10	61J	TL	434/17.1	101/4.0
	120/70-12	3.50 x12	58L	TL	473/18.6	122/4.8
	130/70-12	3.50 x12	62L	TL	487/19.2	129/5.1
	80/80-14	1.85 x14	43P	TL	484/19.1	80/3.1
	90/80-14	2.15 x14	43P	TL	495/19.5	90/3.5
	100/80-14	2.50 x14	48P/54J	TL	516/20.3	101/4.0
	140/70-15	3.75 x15	69P	TL	577/22.8	139/5.5







MOTO ADVENTURE

ADVENTURE RADIAL • CLASSIC TRAIL • TRAIL BIKE



ADVENTURE USAGE GUIDE

ROAD

OFF-ROAD

CM-A1



90%

10%

CM509



80%

20%

CM-A3



70%

30%

CM-A4



60%

40%

CM-A5



50%

50%



RIDE **AMBRO** CM-A1

ADVENTURE RADIAL



- Wide, deep grooves for excellent water dispersal and improved wet riding
- Asymmetrical tread pattern to ensure stability and minimal tire wear
- Large tread blocks for effective grip and stability on sand, rocks and road



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/90-21	2.15 x21	54H	TL	695/27.4	90/3.5
	100/80-17	2.50 x17	52S	TL	592/23.3	101/4.0
	110/80-18	2.50 x18	58S	TL	634/25.0	109/4.3
	110/80R19	2.50 x19	59V	TL	659/25.9	109/4.3
	120/70R19	3.50 x19	60V	TL	651/25.6	122/4.8
	120/70ZR17	3.50 x17	(58W)	TL	601/23.7	122/4.8
R	130/70-17	3.50 x17	62S	TL	614/24.2	129/5.1
	160/60-17	4.50 x17	69S	TL	626/24.6	161/6.3
	150/70R17	4.25 x17	69V	TL	644/25.4	151/5.9
	170/60R17	4.50 x17	72V	TL	636/25.0	168/6.6
	160/60ZR17	4.50 x17	(69W)	TL	624/24.6	161/6.3
	180/55ZR17	5.50 x17	(73W)	TL	634/25.0	178/7.0

RIDE **AMBRO** CM-A3

ADVENTURE RADIAL



- Single steel spiral construction enhances high-speed stability
- Nano-Silica compound improves grip in the wet
- Grooves arrangement guarantees great traction and water/mud dispersal



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/90-21	2.15 x21	54H	TL	700/27.6	90/3.5
	110/80R19	2.50 x19	59V	TL	659/25.9	109 /4.3
	120/70R19	3.50 x19	60V	TL	652/25.7	122 /4.8
	120/70R17	3.50 x17	58H	TL	601/23.7	122/4.8
R	150/70R17	4.25 x17	69V	TL	642/25.3	151/5.9
	160/60R17	4.50 x17	69H	TL	628/24.7	161/6.3
	170/60R17	4.50 x17	72V	TL	636/25.0	168/6.6
	150/70R18	4.25 x18	70V	TL	667/26.3	151/5.9

RIDE **AMBRO** CM-A4N

ADVENTURE RADIAL



- Large Lug pattern provides instant acceleration and braking, ideally suited to off-road conditions
- Central large block pattern design provides higher land ratio and ensures riding stability
- Ridged pattern improves water evacuation and prevents lateral slip



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/90-21	2.15 x21	54H	TL	700/27.6	90/3.54
R	150/70R18	4.25 x18	70H	TL	667/26.3	151/5.94

RIDE **AMBRO** CM-A5

ADVENTURE RADIAL



- Upgraded compound enhances resistance to cutting, providing an ideal balance between durability and grip
- Steel spiral belt construction ensures high-speed stability
- Pattern design features large tread blocks for more traction and improved off-road capability
- Perfect for off-road adventure bikes



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	110/80R19	2.50 x19	59T	TL	662/26.1	109/4.3
	120/70R19	3.50 x19	60T	TL	651/25.6	122/4.8
R	150/70R17	4.25 x17	69T	TL	646/25.4	151/5.9
	170/60R17	4.50 x17	72T	TL	636/25.0	168/6.6
	150/70R18	4.25 x18	70T	TL	672/26.5	151/5.9

CM509

ADVENTURE RADIAL



- The CM509's tread pattern is designed to provide better grip in all weather
- With its improved water evacuation and radial body construction it delivers ultimate riding stability and comfort



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/90R17	2.15 x17	49S	TL	594/23.4	90/3.5
	110/70R17	3.00 x17	54S	TL	586/23.1	110/4.3
	120/70R17	3.50 x17	58H	TL	600/23.7	122/4.8
	110/80R18	2.50 x18	58H	TL	633/25.0	109/4.3
	110/80R19	2.50 x19	59V	TL	659/26.0	109/4.3
	90/90-21	2.15 x21	54H	TL	695/27.4	90/3.5
R	130/60R17	3.50 x17	59S	TL	588/23.2	129/5.1
	140/80R17	3.50 x17	69H	TL	656/25.9	142/5.6
	150/55R17	4.50 x17	64S	TL	598/23.6	148/5.8
	150/70R17	4.25 x17	69V	TL	642/25.3	151/5.9
	160/60R17	4.50 x17	69H	TL	624/24.6	161/6.3
	180/55R17	5.50 x17	73H	TL	630/24.9	178/7.0

CM-AD01

CLASSIC TRAIL



- Large, crossed, central block pattern provides excellent traction and riding stability, for on and off-road use
- Classic lug pattern block ensures cornering stability
- Special sipes on the grooves improve mud and debris ejection
- Upgraded compound delivers great grip and wearing durability



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	110/70-17	3.00 x17	54S	TL	586/23.1	110/4.3
	100/80-17	2.50 x17	52S	TL	592/23.3	101/4.0
	110/80-17	2.50 x17	57S	TL	608/24.0	109/4.3
	110/80-19	2.50 x19	59S	TL	659/26.0	109/4.3
R	130/70-17	3.50 x17	62S	TL	614/24.2	129/5.1
	140/70-17	3.75 x17	66S	TL	630/24.9	119/4.7
	150/60-17	4.25 x17	66S	TL	612/24.1	151/5.9
	150/70-17	4.25 x17	69S	TL	642/25.3	151/5.9

CM-SC05

CLASSIC TRAIL



- New turtle cove block design offers exceptional braking and traction
- Crisscross pattern design over the entire tread guarantees riding stability on paved road, while ensures water, sand and stone dispersal on rugged road surfaces



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	110/80-14	2.50 x14	53P	TL	532/20.9	109/4.3
	130/80-17	3.00 x17	65S	TL	640/25.2	129/5.1
R	130/70-13	3.50 x13	63P	TL	517/20.4	129/5.1
	160/70-17	4.50 x17	73S	TL	659/25.9	161/6.3

C858

TRAIL BIKE



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	3.50-18	2.15 x18	4/6PR	TT	648/25.5	96/3.8
	4.10-18 (S)	2.15 x18	4/6PR	TT	639/25.2	101/4.0
	2.75-21	1.85 x21	4PR	TT	697/27.4	80/3.1

C7201

TRAIL BIKE



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	3.50-16	2.15 x16	4/6PR	TT/TL	598/23.5	93/3.7
	110/90-16	2.50 x16	59P	TT/TL	604/23.8	114/4.5
	2.75-17	1.85 x17	4/6PR	TT	590/23.2	75/3.0
	3.00-17	1.85 x17	45P/4/6PR	TT	602/23.7	80/3.1
	3.50-17	2.15 x17	4PR/54P	TT/TL	624/24.6	93/3.7
	3.00-18	1.85 x18	4/6/8PR	TT/TL	627/24.7	80/3.1
	3.25-18	2.15 x18	4PR	TT	637/25.1	89/3.5
	4.10-18	2.15 x18	6PR	TT	639/25.2	114/4.5
	90/90-18	2.15 x18	6PR	TT	619/24.4	90/3.5
	2.75-21	1.85 x21	6PR	TT	689/27.1	80/3.1



C186

TRAIL BIKE



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	2.75-14	1.85 x14	4/6PR	TT	512/20.2	75/3.0
	3.00-16	1.85 x16	4PR	TT	576/22.7	80/3.1
	3.50-16	2.15 x16	4PR	TT/TL	598/23.5	93/3.7
	110/90-16	2.50 x16	65P	TT/TL	606/23.9	109/4.3
	3.00-17	1.85 x17	4PR	TT	602/23.7	80/3.1
	2.75-18	1.85 x18	4PR	TT	613/24.1	75/3.0
	3.25-18	2.15 x18	4PR	TT	639/25.2	89/3.5
	3.00-18	1.85 x18	4/6PR	TT	630/24.8	80/3.1
	3.50-18	2.15 x18	4PR	TT	654/25.7	93/3.7
	2.75-19	1.85 x19	4PR	TT	639/25.2	75/3.0







MOTO/STREET

RACING • SPORTS TOURING • SPORT
CRUISER • ALL-SEASON • CLASSIC STREET



RIDE *MIGRA* CM-S5

SPORTS TOURING



- Racing body construction provides flexible manoeuvrability and outstanding stability when cornering
- A single wire is spirally wound along the tire circumference to ensure smooth riding, handling stability
- Special pattern design guarantees efficient water dispersal
- Upgraded compound enhances resistance to cutting, providing ideal balance between durability and grip



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	110/70R17	3.00 x 17	54H	TL	586/23.1	110/4.3
	120/70ZR17	3.50 x 17	58W	TL	601/23.7	122/4.8
R	140/70R17	3.75 x 17	66H	TL	628/24.7	139/5.5
	150/60R17	4.25 x 17	66H	TL	613/24.1	151/5.9
	160/60ZR17	4.50 x 17	69W	TL	626/24.6	161/6.3
	180/55ZR17	5.50 x 17	73W	TL	634/25.0	178/7.0
	190/55ZR17	6.00 x 17	75W	TL	646/25.4	190/7.5

CM-SR

RACING



- New, specially developed compound reaches ultimate racing performance in a short time, maintaining this high performance level during riding, giving you the edge in every race
- Special damping design on the sidewall helps reduce impact from the road, delivering a comfortable riding experience
- Sipes on the tread centre provide an ideal balance between grip, rolling resistance and ground connection, ensuring stability at higher speeds



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	3.00-10	2.15 x10	42P	TL	413/16.3	80/3.1
	80/90-10	2.15 x10	44L	TL	402/15.8	82/3.2
F	3.50-10	2.50 x10	51J	TL	440/17.3	92 /3.6
	100/90-12	2.50 x12	49J	TL	485/19.1	101/4.0
	100/80-14	2.50 x14	48L	TL	500/19.7	119/4.7
	90/80-17	2.15 x17	46S	TL	578/22.8	92/3.6
R	100/90-10	2.50 x10	56J	TL	437/17.2	101/4.0
	120/80-12	2.75 x12	55J	TL	500/19.7	119/4.7
	110/70-13	3.00 x13	55L	TL	484/19.1	110/4.3
	130/70-17	3.50 x17	62S	TL	614/24.2	129/5.1
F/R	70/90-17	1.60 x17	38P	TL	558/22.0	69/2.7



CM-SR1 CM-SR2

RACING



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/80R17	2.15 x17	46H	TL	576/22.7	90/3.5
R	110/70R17	3.00 x17	54H	TL	586/23.1	110/4.3



CM-SR01F CM-SR01R

RACING



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/70R17	2.75 x17	49H	TL	580/22.9	97/3.8
	110/70R17	3.00 x17	54H	TL	590/23.3	104/4.1
	120/70R17	3.50 x17	58W	TL	603/23.7	119/4.7
R	120/70R17	3.50 x17	58H	TL	600/23.7	119/4.7
	140/70R17	3.75 x17	66H	TL	628/24.8	138/5.4
	190/60R17	5.50 x17	78W	TL	658/25.9	190/7.5



CM-SR10

RACING



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/70R17(F)	2.75 x17	49H	TL	582/22.9	95/3.7
	110/70R17	3.00 x17	54H	TL	590/23.2	104/4.1
	120/70ZR17	3.50 x17	(58W)	TL	603/23.7	119/4.7
R	120/70R17(R)	3.50 x17	58H	TL	600/23.6	117/4.6
	140/70R17	3.75 x17	66H	TL	628/24.8	138/5.4
	150/60R17	4.25 x17	66H	TL	613/24.1	151/5.9
	160/60ZR17	4.50 x17	(69W)	TL	624/24.6	161/6.3
	180/60ZR17	5.50 x17	(75W)	TL	657/25.9	190/7.5

CM-SRR

RACING



- Radial structure provides better high-speed stability and acceleration
- Lightweight provides better handling ability
- Brand new track-level tire design, provides stronger support and grip when taking corners, and offers a higher sense of security



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/90R12	2.50 x12	49P	TL	493/19.4	101/4.0
R	120/80R12	2.75 x12	55P	TL	503/19.8	119/4.7



CM556 CM558

RACING



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/80-12	2.50 x12	56J	TL	460/18.1	96/3.8
R	120/80-12	2.75 x12	65J	TL	497/19.6	119/4.7



C6109

RACING



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/80-12	2.50 x 12	56J	TL	465/18.3	101/4.0
R	120/80-12	2.75 x 12	65J	TL	497/19.6	119/4.7

RIDE *MIGRA* CM-S1

SPORTS TOURING



- Excellent high-speed stability
- Flexible manoeuvrability and outstanding stability when cornering
- Perfect performance, both in the wet and dry
- Superb ride comfort, ideally suited to sports/touring motorcycles
- Radial construction for low fuel consumption on long journeys



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	110/70R17	3.00 x 17	54H	TL	586/23.1	110/4.3
	120/70ZR17	3.50 x 17	58W	TL	600/23.7	122/4.8
R	140/60R17	3.75 x 17	63H	TL	600/23.7	139/5.5
	140/70R17	3.75 x 17	66H	TL	628/24.8	139/5.5
	150/60R17	4.25 x 17	66H	TL	612/24.1	151/5.9
	160/60ZR17	4.50 x 17	69W	TL	624/24.6	161/6.3
	180/55ZR17	5.50 x 17	73W	TL	630/24.9	178/7.0
	190/50ZR17	6.00 x 17	73W	TL	622/24.5	190/7.5
	190/55ZR17	6.00 x 17	75W	TL	642/25.3	190/7.5
	200/50ZR17	6.25 x 17	75W	TL	632/24.9	200/7.9

CM-DR

RACING



- Semi-racing compound delivers excellent wet and dry grip, while maintaining a high level of durability
- Radial construction, with Aramid protection, provides excellent high-speed stability and handling control
- Streamlined grooves improve water dispersal, and enhance tire rigidity
- CST shoulder sipes improve wet grip
- Suitable for 250cc – 400cc bikes



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/80R17	2.50 x 17	52H	TL	592/23.4	101/4.0
	110/70R17	3.00 x 17	54H	TL	586/23.1	110/4.3
R	130/70R17	3.50 x 17	62H	TL	614/24.2	129/5.1
	140/70R17	3.75 x 17	66H	TL	630/24.9	139/5.5
	150/60R17	4.25 x 17	66H	TL	612/24.1	151/5.9

CM615/CM616

SPORTS TOURING



- Large contact patch provides better driving comfort and stability
- For best performance, please use front and rear tire together
- Superior void ratio and groove width design provide excellent low-speed grip performance and better water evacuation



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/80R17	2.50 x 17	52H	TL	592/23.4	101/4.0
	110/70R17	3.00 x 17	54H	TL	586/23.1	110/4.3
	120/70R17	3.50 x 17	58H	TL	600/23.7	122/4.8
R	130/70R17	3.50 x 17	62H	TL	614/24.2	129/5.1
	140/70R17	3.75 x 17	66H	TL	628/24.8	139/5.5
	150/60R17	4.25 x 17	66H	TL	616/24.3	149/5.9
	160/60R17	4.50 x 17	69H	TL	624/24.6	161/6.3



RIDE **MIGRA** CM-S3N

SPORT RADIAL



- Jointless spiral steel belt radial construction provides excellent high-speed handling and stability
- New sporty tire design optimises the profile on the basis of CM-S1, more closer to racing tires, providing excellent handling and stability
- Special compound provides excellent dry and wet grip; dual-compound on rear tire guarantees high durability and enables nimble handling and stability when cornering
- Optimised proportions of groove width and density provides good drainage



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	110/70R17	3.00 x17	54H	TL	587/23.1	110/4.3
	120/70ZR17	3.50 x17	(58W)	TL	601/23.7	122/4.8
R	140/70R17	3.75 x17	66H	TL	628/24.7	139/5.5
	150/60R17	4.25 x17	66H	TL	613/24.1	151/5.9
	160/60ZR17	4.50 x17	(69W)	TL	624/24.6	161/6.3
	180/55ZR17	5.50 x17	(73W)	TL	632/24.9	178/7.0
	190/55ZR17	6.00 x17	(75W)	TL	646/25.4	190/7.5
	200/55ZR17	6.25 x17	(78W)	TL	652/25.7	200/7.9

ADRENO SPORT CM-AS5

SPORT RADIAL



- Radial tire construction offers better high-speed handling stability, flexibility and riding comfort
- New optimised sport design for enhanced high-speed and cornering stability, suitable for amateur riders
- Streamlined sport pattern design and high land ratio on the tread provides larger contact patch, ensuring excellent grip



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	110/70R17	3.00 x17	54H	TL	586/23.1	110/4.3
	120/70ZR17	3.50 x17	58W	TL	601/23.7	122/4.8
R	140/70R17	3.75 x17	66H	TL	628/24.7	139/5.5
	150/60R17	4.25 x17	66H	TL	612/24.1	151/5.9
	160/60ZR17	4.50 x17	69W	TL	628/24.7	161/6.3
	180/55ZR17	5.50 x17	73W	TL	630/24.8	178/7.0
	190/50ZR17	6.00 x17	73W	TL	625/24.6	190/7.5



C907Y/C907R

CRUISER RADIAL



- Jointless spiral steel belt radial construction delivers excellent high-speed handling and stability
- Large contact patch provides riding stability, suitable for cruisers



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/90-19	2.50 x19	57H	TL	663/26.1	101/4.0
R	240/45R17	8.50 x17	82H	TL	648/25.5	240/9.4

CM-T1

CRUISER RADIAL



- Using radial structure enhances the stiffness for whole tire, provides higher loading index and high-speed stability, more suitable for cruiser
- High land ratio design provides superior grip and riding stability.
- Steamlined groove ensures riding stability and greater water evacuation



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	130/70R18	3.50 x18	63H	TL	640/25.2	129/5.1
R	180/60R16	5.00 x16	74H	TL	622/24.5	180/7.1
	200/55R16	6.25 x16	77V	TL	652/24.6	200/7.9

CM-NK01

CLASSIC STREET

- Innovative profile design delivers nimble riding performance
- Optimised compound provides excellent grip without compromising on mileage and wear performance



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/80-17	2.50 x17	52S	TL	592/23.4	101/4.0
	110/70-17	3.00 x17	54S	TL	586/23.1	110/4.3
	110/80-17	2.50 x17	57S	TL	608/24.0	109/4.3
	120/70-17	3.50 x17	58P	TL	600/23.6	122/4.8
R	130/70-17	3.50 x17	62S	TL	614/24.2	129/5.1
	140/70-17	3.75 x17	66S	TL	630/24.9	119/4.7
	140/60-17	3.75 x17	63S	TL	601/23.7	139/5.5
	150/60-17	4.25 x17	66S	TL	612/24.1	151/5.9
	150/70-17	4.25 x17	69P	TL	642/25.3	151/5.9

CM617

CLASSIC STREET

- Innovative tread pattern for high-speed cornering and stability
- Radial construction for larger contact patch and ride comfort



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	100/90-18	2.50 x 18	56P	TT	639/25.2	101/4.0
	80/100-19	1.85 x 19	49P	TL	643/25.3	80/3.1
	100/90-19	2.50 x 19	57S	TT	663/26.1	101/4.0
	90/90-21	2.15 x 21	54P	TT	696/27.4	90/3.5
R	120/90-16	2.75 x 16	63P	TL	622/24.5	119/4.7
	130/80-17	3.00 x 17	65P	TT	643/25.3	129/5.1
	150/70-17	4.25 x 17	69S	TT	642/25.3	151/5.9



CM619/CM620

CLASSIC STREET



- Main and second grooves are two sets of circular lines
- Symmetrical layout provides slip and slide resistance on wet and dry roads
- Improved traction and manoeuvrability



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/90-17	2.15 x 17	49S	TL	594/23.4	90/3.5
	60/80-17	1.40 x 17	27P	TT	529/20.8	62/2.4
	70/80-17	1.60 x 17	35P	TT	546/21.5	70/2.8
	70/90-17	1.60 x 17	38P	TL	558/22.0	69/2.7
	80/80-17	1.85 x 17	41P	TT	562/22.1	81/3.2
	80/90-17	1.85 x 17	44S	TL	576/22.7	80/3.1
	90/80-17	2.15 x 17	46P	TT	576/22.7	90/3.5
R	100/80-17	2.50 x 17	52P	TT	592/23.3	101/4.0
	110/80-17	2.50 x 17	57S	TL	608/23.9	109/4.3
	120/70-17	3.50 x 17	58P	TL	601/23.7	122/4.8
	120/80-17	2.75 x 17	61S	TL	624/24.6	119/4.7



CM642

CLASSIC STREET



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	2.25-17	1.60 x17	4PR	TT	556/21.9	61/2.4
	2.50-17	1.60 x17	6PR	TT	570/22.4	65/2.6
	2.75-17	1.85 x17	6PR	TT	588/23.1	75/3.0
	2.50-18	1.60 x18	6PR	TT	593/23.3	65/2.6
	2.75-18	1.85 x18	6PR	TT	613/24.1	75/3.0
	70/90-17	1.60 x17	38L	TL	558/22.0	69/2.7
	80/90-17	1.85 x17	50P	TL	576/22.7	80/3.1

CM647

CLASSIC STREET



- Rib-lug pattern design reduces rolling resistance, providing better straightline acceleration and anti-slide characteristics
- Tread pattern with strengthened rib connections helps improve rigidity



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	2.75-17	1.85 x 17	4PR	TT	588/23.1	75/3.0
	2.75-18	1.85 x 18	4PR	TT	613/24.1	75/3.0

CM668X/CM668

CLASSIC STREET



- Optimised profile design, ideal for cruisers, delivers excellent stability and comfort
- High land ratio pattern provides good riding comfort and a new standard of riding experience
- Improved grip compound delivers excellent control on wet roads
- Suitable for cement and asphalt roads



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	120/80-16	2.75 x16	60H	TL	600/23.6	119/4.7
	120/80-18	2.75 x18	62S	TL	649/25.6	119/4.7
R	150/80-15	3.50 x15	70S	TL	625/24.6	150/5.9
	140/70-16	3.75 x16	65H	TL	604/23.8	139/5.5
	170/60-17	4.50 x17	72P	TL	636/25.0	168/6.6

CM669/CM670

CLASSIC STREET



- Multiple cross-groove design ensures even distribution of tire blocks, provides better balance between durability and cornering stability, while offering extremely efficient water dispersal and handling control
- Classic tread pattern with optimised profile guarantees grip on wet roads



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	130/90-16	3.00 x16	67H	TL	640/25.2	129/5.1
	110/70-17	3.00 x17	54S	TT	586/23.1	110/4.3
R	150/80-16	3.50 x16	71H	TL	646/25.4	150/5.9
	180/65-16	5.00 x16	81S	TL	642/25.3	180/7.1
	140/70-17	3.75 x17	66S	TT	628/24.7	139/5.5

CM658

CLASSIC STREET



- Deep tire groove ensures excellent durability and tire loading
- Staggered design in tread center creates a criss-cross groove that delivers outstanding grip on wet roads
- Diamond design on tread shoulder improves anti-slide performance characteristics and ensures riding safety
- Suitable for cement road, asphalt road and on-off road



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
R	3.00-18	1.85 x 18	8PR	TT/TL	627/24.7	80/3.1



C6532

CLASSIC STREET



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	3.50-16	2.15 x 16	4/6PR	TT/TL	598/23.5	93/3.7
	2.50-17	1.60 x 17	4/6/8PR	TT/TL	568/22.4	65/2.6
	2.75-17	1.85 x 17	4/6PR	TT/TL	588/23.1	78/3.1
	2.75-18	1.85 x 18	4/6PR	TT/TL	613/24.1	75/3.0
	3.00-18	1.85 x 18	4/6/8PR	TT/TL	627/24.7	80/3.1
	3.00R18	1.85 x 18	8PR	TT	627/24.7	80/3.1
	3.25-18	2.15 x 18	4PR	TT/TL	639/25.2	89/3.5
	90/90-18	2.15 x 18	51P	TT/TL	619/24.4	90/3.5



C6559F(Y) C6559



CLASSIC STREET

	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/90-19	2.15 x19	52P	TT/TL	645/25.4	90/3.5
R	130/60-13	3.50 x13	53J	TL	486/19.1	129/5.1
	110/90-17	2.50 x17	60P	TT/TL	630/24.8	109/4.3





C910

CLASSIC STREET



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	2.75-18	1.85 x18	4PR/42P	TT/TL	612/24.1	76/3.0
	80/100-18	1.85 x18	47P	TT/TL	617/24.3	80/3.1



C919

CLASSIC STREET

- Streamlined pattern delivers excellent water dispersal
- Vertical groove on the tread centre guarantees better manoeuvrability, suitable for paved road
- Performs best on cement roads and asphalt roads



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F/R	80/90-14	1.85 x14	40P/46P	TL	500/19.7	84/3.3
	2.25-17	1.60 x17	4PR	TT	556/21.9	60/2.4
	2.50-17	1.60 x17	4PR	TT	568/22.4	65/2.6
	2.75-17	1.85 x17	4PR	TT/TL	588/23.1	75/3.0
	2.50-18	1.60 x18	4PR	TT	593/23.3	65/2.6
	2.75-18	1.85 x18	4PR	TT/TL	613/24.1	80/3.1
	3.00-18	1.85 x18	4PR	TT	627/24.7	80/3.1





OFF-ROAD

SAND • MX • TRIALS • ENDURO



BITE^{MX}

CM733/CM734

MX



- Tread blocks in central area help release mud for better cornering traction
- Tread blocks extending from the center to the shoulder provide supreme cornering stability
- Sipes in the tire blocks supply excellent grip and traction on soft terrain
- Multiple side-by-side rows of tread blocks provide high levels of lateral traction
- Large shoulder tread blocks offer exceptional cornering stability
- Siped knobs provide superior grip and traction on soft terrain



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	80/100-21	1.85 x21	51M	TT	706/27.8	92/3.6
	100/90-18	2.50 x18	56M	TT	650/25.6	118/4.6
R	110/90-18	2.50 x18	61M	TT	668/26.3	129/5.1
	100/90-19	2.50 x19	57M	TT	687/27.0	120/4.7
	110/90-19	2.50 x19	62M	TT	691/27.3	129/5.1

LEGION MX-VI

CM702/CM703



MX



- The Legion MX-VI features an innovative tread pattern designed for dominance on the motocross battlefield
- Long, varied tread pitches ensure that the Legion MX-VI hooks up in the variety of soil conditions found on a typical intermediate MX track
- For the rear tire, center tread knobs claw forward and clean out, while more tightly spaced shoulder knobs provide a stable platform for traction when leaning over
- Uniquely shaped shoulder knobs on the front deliver extreme braking traction and control into and around corners



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	60/100-14	1.40 x14	29M	TT	482/19.0	69/2.7
	70/100-17	1.60 x17	40M	TT	579/22.8	77/3.0
	70/100-19	1.60 x19	42M	TT	630/24.8	82/3.2
	80/100-21	1.85 x21	51M	TT	714/28.0	95/3.7
	90/100-21	2.15 x21	57M	TT	722/28.4	102/4.0
R	80/100-12	1.85 x12	47M	TT	473/18.6	80/3.1
	90/100-14	2.15 x14	49M	TT	545/21.5	100/3.9
	90/100-16	2.15 x16	50M	TT	595/23.4	103/4.1
	100/100-18	2.50 x18	59M	TT	667/26.3	117/4.6
	110/100-18	2.50 x18	64M	TT	684/26.9	130/5.1
	120/100-18	2.75 x18	68M	TT	716/28.2	136/5.4
	100/90-19	2.50 x19	57M	TT	663/26.1	105/4.1
	110/80-19	2.50 x19	59M	TT	668/26.3	113/4.4
	110/90-19	2.50 x19	62M	TT	693/27.3	133/5.2
	120/80-19	2.75 x19	63M	TT	678/26.7	119/4.7
120/90-19	2.75 x19	66M	TT	717/28.2	136/5.4	

LEGION TRIALS CM711 / CM712

TRAILS



- Dominate the competition with the Legion Trials tire
- The Legion Trials provides exceptional traction with its ultra-soft rubber compounds and dynamic tread design, excelling in a variety of applications including dirt, rocks, roots, and gravel
- The tubeless 18-inch radial rear tire provides a wide footprint for enhanced performance



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	2.75-21	1.85 x21	4 PR	TT	705/27.8	80/3.1
R	4.00R18	2.15 x18	4 PR	TL	700/27.6	103/4.1

CM713

TRAILS



- Bridge on tread area strengthens whole block stiffness, improving traction
- Suitable for intermediate and soft terrain



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	70/100-19	1.60 x19	42M	TT	629/24.8	69/2.7
R	80/100-19	1.85 x19	49M	TT	649/25.6	80/3.1

LEGION DESERT CM715/CM716

MX/SAND



- The Legion Desert is engineered for the performance and durability demanded in hot, rocky and sandy conditions
- The Legion Desert front tire has a consistent center tread for smooth rolling, paired with aggressive shoulder knobs for extra bite for turning and traction in sandy areas
- The rear tire features a large contact patch, keeping more rubber hooked to the ground for maximum traction



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	80/100-21	1.85 x21	51M	TT	710/28.0	90/3.5
R	110/100-18	2.50 x18	64M	TT	685/27.0	130/5.1

LEGION PRO S/I CM736/CM737

MX/SAND



- All new, innovative pattern design combined with a stronger carcass delivers excellent control and feel
- Purposed knob angle and pattern arrangement on shoulder of rear tire offer enhanced cornering and stability
- Improved lean angle grip gives the rider confidence to push their limits at any skill level



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	80/100-21	1.85 x21	51M	TT	706/27.8	94/3.7
R	110/90-19	2.50 x19	62M	TT	659/25.9	129/5.1

LEGION PRO I/H CM738/CM739

MX



- New, innovative pattern design and reinforced carcass delivers excellent rider control and feel
- Bridge design and pattern block in middle of the rear tire create improved stability in all conditions
- Specially formulated compound provides both excellent traction and rugged durability in intermediate to hard track conditions



HARD INTERMEDIATE SOFT SAND

	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	80/100-21	1.85 x21	51M	TT	706/27.8	94/3.7
R	100/90-18	2.50 x18	56M	TT	652/25.7	120/4.7
	110/90-18	2.50 x18	61M	TT	665/26.2	129/5.1
	100/90-19	2.50 x19	57M	TT	679/26.7	120/4.7
	110/90-19	2.50 x19	62M	TT	659/25.9	129/5.1

C7211/C7212

MX/SAND



HARD INTERMEDIATE SOFT SAND



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	70/100-19	1.60 x19	42M	TT	633/24.9	83/3.3
	80/100-21	1.85 x21	51M	TT	704/27.7	92/3.6
R	90/100-16	2.15 x16	51M	TT	602/23.7	109/4.3
	100/90-18	2.50 x18	62M	TT	653/25.7	120/4.7
	110/90-18	2.50 x18	61M	TT	659/25.9	126/5.0
	100/90-19	2.50 x19	63M	TT	687/27.0	120/4.7
	110/90-19	2.50 x19	62M	TT	689/27.1	126/5.0

SURGE I C7209/C7210

MX



- The Surge I specialised tread design excels in a wide variety of intermediate terrains, on the MX track or in the woods
- Its stable block tread pattern provides predictable acceleration and braking
- The high durability of the Surge I's construction makes for lasting performance



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	70/100-19	1.60 x19	42M	TT	635/25.0	83/3.3
	80/100-21	1.85 x21	51M	TT	707/27.8	95/3.7
R	90/100-16	2.15 x16	51M	TT	602/23.7	109/4.3
	100/90-18	2.50 x18	62M	TT	653/25.7	120/4.7
	110/90-18	2.50 x18	61M	TT	659/25.9	126/5.0
	120/100-18	2.75 x18	68M	TT	716/28.2	136/5.4
	100/90-19	2.50 x19	63M	TT	687/27.0	120/4.7
	110/90-19	2.50 x19	62M	TT	693/27.3	130/5.1

SURGE P C7220

MX/SAND



- The Surge P is a modified rear motocross tire that is best utilised with other front Surge tires
- The special compound applied to the tire was developed for longer tire life in tougher conditions
- The Surge P is lightweight with eight sand-slinging, cupped paddles. A round profile helps the tire float through sand with ease. The tire paddles have optimal depth for the utmost traction in the dunes



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
R	110/100-18	2.50 x18	64M	TT	711/28.0	120/4.7
	100/90-19	2.50 x19	57M	TT	691/27.2	105/4.1
	110/90-19	2.50 x19	62M	TT	723/28.5	116/4.6



BITE *ENDURO*

CM741 / CM742

ENDURO



- The upgraded and innovative pattern design has been developed to provide extra resistance to cracks and abrasions
- The Bite Enduro delivers outstanding traction and cornering stability
- An excellent universal tire, suitable for all conditions

HARD INTERMEDIATE SOFT SAND



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/90-21	2.15 x21	54M	TT	695/27.4	90/3.5
R	140/80-18	3.50 x18	70M	TT	681/26.8	142/5.6

CM-EX01

ENDURO



- Staggered design of blocks ensures performance on different road conditions
- Reasonable distribution of knobs meets demand for different surfaces
- Horizontal blocks layout provides good traction on dirt/mud



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	4.00-18	2.50 x18	4PR	TT	668/26.3	108/4.3
	90/90-21	2.15 x21	54R/54M	TL	704/27.7	90/3.5
R	4.60-17	2.75 x17	4PR	TT	644/25.4	117/4.6
	140/80-18	3.50 x18	70R/70M	TL	688/27.1	142/5.6

CM-EX02F/CM-EX02R

ENDURO



- Central large block and small lug increase contact area, improve riding stability and generate more friction with enhanced grip in muddy terrain
- Small groove design on blocks helps dissipate tire heat which improves tire durability
- Dedicated design for rally racing



	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)
F	90/90-21	1.60 x21	54R	TT	704/27.7	94/3.7
R	140/80-18	2.50 x18	70R	TT	696/27.4	142/5.6

IMPORTANT



MOTORCYCLE TIRES SAFETY INFORMATION

- Consult your owner's manual for specific tire information.
- Clearance around tires must be maintained. Check with the motorcycle/ATV manufacturer before attempting to mount tire sizes which differ from those stated in the owner's manual. Altering the tire size may require a different rim size. For this reason, we suggest you consult your dealer to be sure the rim size is compatible before making any changes to the tire size on your vehicle. Be sure adequate clearance is maintained at all times.
- When replacing tube-type tires, be sure to replace the inner tubes. Stretched inner tubes can crease and fail due to thinning of the inner tube rubber. Make sure inner tube size matches the tire size. Consult your motorcycle dealer for correct rim band replacement.
- The air pressure inside the tire is critical to its handling characteristics and load capability. Check cold tire pressure with an accurate tire pressure gauge before every ride. Tire pressure should not be adjusted immediately after a tire has been in use.
- Follow tire pressure guidelines located in your vehicle's owner's manual. Never exceed maximum inflation pressure indicated on your tire's sidewall.
- Check valve cores. Tighten for correct seating. If valve cores are damaged, replace them.
- Check tires for damage before and after riding. Punctured, cracked, bulging or blistered tires should be replaced immediately. If not replaced, damage can result, including sudden and complete tire failure.
- After replacing worn tires, take time to become acquainted with the handling and performance of your new tires. Check inflation pressure frequently and adjust if needed.
- Tire mounting and dismounting should be handled by professionals. Improper mounting or incorrectly mounted tires can lead to damage to the tire, wheel and/or vehicle and injury or death.
- Tire and wheel assemblies should be balanced before use and each time the tire is removed or replaced. Failure to do so will result in accelerated tread wear.
- Check for broken or damaged spokes and replace as necessary.
- Tires marked as front or rear tires should only be used in their designated position.
- Do not retread, regroove, sipe or otherwise modify tires.
- Do not use dry or liquid balancers. Do not use liquid sealants.
- Do not store tires in direct sunlight for extended periods of time. Store unmounted tires indoors at temperatures above 32°F.
- Allowing tires to stand in oil or gasoline may have an adverse affect on the rubber compounds of the tire.
- Do not mix radial and bias construction tires unless specifically recommended by the manufacturer as the original equipment of the vehicle.
- Never chemically treat tires (i.e. "soaking" or using tire softener in an attempt to alter tire compound).
- Never operate a vehicle beyond the speed rating denoted on the sidewall of the tires. Do not exceed the load rating denoted on the tire sidewall. These situations can cause tire damage, possibly resulting in catastrophic tire failure.
- Wheel alignment is critical to tread life and tire safety. Replace bent or damaged rims or wheels immediately.
- Failure to follow these guidelines can result in accelerated tread wear and may cause catastrophic tire failure. This may result in accident, injury, or death.

CST makes every effort to ensure the accuracy of the information we publish. CST is not responsible for errors or misprints in our materials. Prices, specifications and item availability are subject to change without notice. Actual measurements may vary from those published herein.

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Scooter	CM547(S)	F/R	F/R	3.50-10	2.50x10	59J/59P	TL	437/17.2	92/3.6	10
Scooter	CM547(S)	F/R	F/R	90/90-10(Y)	2.15x10	55J	TL	416/16.4	90/3.5	10
Scooter	CM547(S)	F/R	F/R	100/80-10	2.50x10	58P	TL	414/16.3	101/4.0	10
Scooter	CM547(S)	F/R	F/R	100/90-10	2.50x10	61J	TL	430/16.9	101/4.0	10
Scooter	CM547(S)	F/R	F/R	110/70-12	3.00x12	56J	TL	459/18.1	110/4.3	10
Scooter	CM547(S)	F/R	F/R	120/70-10	3.50x10	54M	TL	422/16.6	122/4.8	10
Scooter	CM547(S)	F/R	F/R	130/70-12	3.50x12	56L/ 62S	TL	487/19.2	129/5.1	10
Scooter	CM547(S)	F/R	F/R	120/70-12	3.50x12	51L/58S	TL	473/18.6	122/4.8	10
Scooter	CM547(S)	F/R	F/R	130/70-10	3.50x10	62M	TL	431/17.0	129/5.1	10
Scooter	CM547(S)	F/R	F/R	110/70-11(K)	3.00x11	45L	TL	433/17.0	110/4.3	10
Scooter	CM547(S)	F/R	F/R	120/70-11	3.50x11	56L	TL	447/17.6	122/4.8	10
Scooter	CM547(S)	F/R	F/R	110/80-12	2.50x12	61L	TL	481/18.9	109/4.3	10
Scooter	CM547(S)	F/R	F/R	110/70-13	3.00x13	48P	TL	484/19.1	110/4.3	10
Scooter	CM547(S)	F/R	F/R	110/90-13	2.50x13	56P	TL	528/20.8	109/4.3	10
Scooter	CM547(S)	F/R	F/R	130/70-13	3.50x13	63P	TL	512/20.2	129/5.1	10
Scooter	CM547(S)	F/R	F/R	130/60-13	3.50x13	60S	TL	490/19.3	124/4.9	10
Scooter	CM547(S)	F/R	F/R	140/70-13	3.75x13	61S	TL	530/20.9	139/5.5	10
Scooter	CM547(S)	F/R	F/R	100/90-14	2.50x14	57P	TL	536/21.1	101/4.0	10
Scooter	CM547(S)	F/R	F/R	90/80-14	2.15x14	43P	TL	501/19.7	90/3.5	10
Scooter	CM547(S)	F/R	F/R	110/80-14	2.50x14	59S	TL	532/21.0	109/4.3	10
Scooter	CM547(S)	F/R	F/R	150/70-14	4.25x14	66S	TL	566/22.3	151/5.9	10
Scooter	CM547(S)	F/R	F/R	90/80-16	2.15x16	51S	TL	547/21.6	90/3.5	10
Scooter	CM547(S)	F/R	F/R	90/90-16	2.15x16	48H	TL	568/22.4	90/3.5	10
Scooter	CM547(S)	F/R	F/R	100/80-16	2.50x16	56S	TL	567/22.4	102/4.0	10
Scooter	CM547(S)	F/R	F/R	110/70-16	3.00x16	52S	TL	559/22.1	110/4.3	10
Scooter	CM547(S)	F/R	F/R	130/70-16	3.50x16	61S	TL	588/23.1	129/5.1	10
Scooter	CM547(S)	F/R	F/R	120/80-16	2.75x16	60S	TL	598/23.6	119/4.7	10
Scooter	CM547(S)	F/R	F/R	140/70-16	3.75x16	65S	TL	602/23.8	139/5.5	10
Scooter	CM576	F	F	90/90-12	2.15x12	44J	TL	467/18.4	90/3.5	11
Scooter	CM576	F	F	120/70-13	3.50x13	59S	TL	498/19.6	122/4.8	11
Scooter	CM576	F	F	110/70-16	3.00x16	52P	TL	560/22.0	110/4.3	11
Scooter	CM576	F	F	110/80-14	2.50x14	53P	TL	532/20.9	109/4.3	11
Scooter	CM576	F	F	120/70-15	3.50x15	56S	TL	549/21.6	122/4.8	11
Scooter	CM576	F	F	120/80-14	2.75x14	58S	TL	548/21.6	119/4.7	11
Scooter	CM577	R	R	100/90-10	2.50x10	56J	TL	430/16.9	101/4.0	11
Scooter	CM577	R	R	120/80-12	2.75x12	65S	TL	497/19.6	119/4.7	11
Scooter	CM577	R	R	110/80-14	2.50x14	59P	TL	532/20.9	109/4.3	11
Scooter	CM577	R	R	120/70-14	3.50x14	61P	TL	524/20.6	122/4.8	11
Scooter	CM577	R	R	130/70-14	3.50x14	61P	TL	533/21.0	124/4.9	11
Scooter	CM577	R	R	140/70-14	3.75x14	68S	TL	552/21.7	139/5.5	11
Scooter	CM577	R	R	150/70-14	4.25 x14	66S	TL	566/22.3	151/5.9	11
Scooter	CM-SC01	F/R	F/R	100/90-10	2.50x10	56J	TL	434/17.1	101/4.0	6
Scooter	CM-SC01	F/R	F/R	90/90-12	2.15x12	44J	TL	467/18.4	90/3.5	6

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Scooter		CM-SC01	F/R	100/90-12	2.50x12	59J	TL	485/19.1	101/4.0	6
Scooter		CM-SC01	F/R	110/90-12	2.50x12	64J	TL	503/19.8	109/4.3	6
Scooter		CM-SC01	F/R	110/70-12	3.00x12	47P	TL	459/18.1	110/4.3	6
Scooter		CM-SC01	F/R	120/70-12	3.50x12	58P	TL	473/18.6	122/4.8	6
Scooter		CM-SC01	F/R	130/70-12	3.50x12	62P	TL	487/19.2	129/5.1	6
Scooter		CM-SC01	F/R	110/70-13	3.00x13	48P	TL	484/19.1	110/4.3	6
Scooter		CM-SC01	F/R	130/70-13	3.50x13	63P	TL	512/20.2	129/5.1	6
Scooter		CM-SC01	F/R	70/90-14	1.60x14	34P	TL	482/19.0	69/2.7	6
Scooter		CM-SC01	F/R	80/80-14	1.85x14	43S	TL	484/19.1	80/3.1	6
Scooter		CM-SC01	F/R	80/90-14	1.85x14	46P	TL	500/19.7	80/3.1	6
Scooter		CM-SC01	F/R	90/80-14	2.15x14	43P	TL	500/19.7	90/3.5	6
Scooter		CM-SC01	F/R	90/90-14	2.15x14	46P	TL	518/20.4	90/3.5	6
Scooter		CM-SC01	F/R	100/90-14	2.50x14	57P	TL	536/21.1	101/4.0	6
Scooter		CM-SC01	F/R	100/80-14	2.50x14	48P	TL	516/20.3	101/4.0	6
Scooter		CM-SC01	F/R	110/80-14	2.50x14	59S	TL	532/20.9	109/4.3	6
Scooter		CM-SC01	F/R	120/80-14	2.75x14	58S	TL	548/21.6	119/4.7	6
Scooter		CM-SC01	F/R	100/80-16	2.50x16	50P	TL	566/22.3	101/4.0	6
Scooter		CM-SC01	F/R	120/80-16	2.75x16	60P	TL	600/23.6	119/4.7	6
Scooter		CM-SC01	F/R	110/70-14	3.00x14	50P	TL	513/20.2	110/4.3	6
Scooter		CM-SC01	F/R	120/70-13	3.50x13	59S	TL	500/19.7	122/4.8	6
Scooter		CM-SC01	F/R	120/70-15	3.50x15	56S	TL	549/21.6	122/4.8	6
Scooter		CM-SC01	F/R	150/70-13	4.25x13	64S	TL	540/21.3	151/5.9	6
Scooter		CM-SC01	F/R	120/70-14	3.50x14	55P	TL	524/20.6	122/4.8	6
Scooter		CM-SC01	F/R	140/70-14	3.75x14	68S	TL	555/21.9	139/5.5	6
Scooter		CM-SC01	F/R	150/70-14	4.25x14	66S	TL	566/22.3	151/5.9	6
Scooter		CM-SC01	F/R	130/60-13	3.50x13	53J	TL	486/19.1	129/5.1	6
Scooter		CM-SC01	F/R	140/60-13	3.75x13	57P/63S	TL	498/19.6	139/5.5	6
Scooter		CM-SC01	F/R	140/60-14	3.75x14	64P/64S	TL	525/20.7	139/5.5	6
Scooter		CM-SC01	F	120/70R15	3.50x15	56H	TL	549/21.6	122/4.8	6
Scooter		CM-SC01	R	160/60R15	4.50x15	67H	TL	573/22.6	161/6.3	6
Scooter		CM-SC02	F/R	3.50-10	2.50x10	51P	TL	437/17.2	92/3.6	12
Scooter		CM-SC02	F/R	90/90-10	2.15x10	50P	TL	416/16.4	90/3.5	12
Scooter		CM-SC02	F/R	100/90-10	2.50x10	56P	TL	434/17.1	101/4.0	12
Scooter		CM-SC02	F/R	90/90-12	2.15x12	54P	TL	467/18.4	90/3.5	12
Scooter		CM-SC02	F/R	110/70-12	3.00x12	47P	TL	459/18.1	110/4.3	12
Scooter		CM-SC02	F/R	120/70-12	3.50x12	51P	TL	473/18.6	122/4.8	12
Scooter		CM-SC02	F/R	130/70-12	3.50x12	56P	TL	487/19.2	129/5.1	12
Scooter		CM-SC07	F/R	110/70-12	3.00x12	47P	TL	459/18.1	110/4.3	12
Scooter		CM-SC07	F/R	120/70-12	3.50x12	51P	TL	473/18.6	122/4.8	12
Scooter		CM-SC07	F/R	130/70-12	3.50x12	56P	TL	487/19.2	129/5.1	12
Scooter		CM-SC12	F/R	3.00-8	2.15x8	8PR	TL	365/14.4	80/3.1	8
Scooter		CM-SC12	F/R	2.75-10	1.75x10	8PR	TL	400/15.7	71/2.8	8
Scooter		CM-SC12	F/R	3.00-10	2.15x10	8PR	TL	413/16.3	80/3.1	8

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Scooter		CM-SC12	F/R	3.50-10	2.50x10	4PR	TL	437/17.2	92/3.6	8
Scooter		CM-SC12	F/R	60/100-10	1.40x10	8PR	TL	376/14.8	60/2.4	8
Scooter		CM-SC12	F	70/90-12	1.60x12	41L	TL	431/17.0	69/2.7	8
Scooter		CM-SC12	R	80/80-12	1.85x12	8PR	TL	435/17.1	80/3.1	8
Scooter		CM-SC12	F	90/80-12	2.15x12	50L	TL	449/17.7	90/3.5	8
Scooter		CM-SC12	F	90/90-12	2.15x12	44L	TL	467/18.4	90/3.5	8
Scooter		CM-SC12	R	100/90-10	2.50x10	56L	TL	434/17.1	101/4.0	8
Scooter		CM-SC12	F	110/70-12	3.00x12	8PR	TL	459/18.1	110/4.3	8
Scooter		CM-SC12	R	120/70-12	3.50x12	58L	TL	473/18.6	122/4.8	8
Scooter		CM-SC12	R	130/70-12	3.50x12	8PR	TL	487/19.2	129/5.1	8
Scooter		CM-SC12	F	110/70-13	3.00x13	48P	TL	484/19.1	110/4.3	8
Scooter		CM-SC12	R	130/70-13	3.00x13	63P	TL	512/20.2	129/5.1	8
Scooter		CM-TR	F/R	3.50-10	2.50x10	51P	TL	434/17.1	92/3.6	13
Scooter		CM-TR	F/R	90/90-10	2.15x10	50P	TL	416/16.4	90/3.5	13
Scooter		CM-TR	F/R	100/90-10	2.50x10	56P	TL	437/17.2	101/4.0	13
Scooter		CM-TR	F/R	90/90-12	2.15x12	54P	TL	467/18.4	90/3.5	13
Scooter		CM-TR	F/R	120/70-12	3.50x12	51P	TL	470/18.5	122/4.8	13
Scooter		CM-TR	F/R	130/70-12	3.50x12	56P	TL	485/19.1	129/5.1	13
Scooter		CM-TR	F/R	110/70-13	3.00x13	54L	TL	486/19.1	110/4.3	13
Scooter		CM-TR	F/R	120/70-13	3.50x13	62P	TL	498/19.6	122/4.8	13
Scooter		CM-TR	F/R	130/70-13	3.50x13	63P	TL	512/20.2	129/5.1	13
Scooter		CM-TR	F/R	110/80-14	2.50x14	53P	TL	532/20.9	109/4.3	13
Scooter		CM-TR	F/R	140/70-14	3.75x14	68P	TL	552/21.7	139/5.5	13
Scooter		CM502	R	3.00-10	2.15x10	42J	TL	413/16.3	80/3.1	13
Scooter		CM502	R	3.50-10	2.50x10	51J	TL	437/17.2	92/3.6	13
Scooter		CM502	R	90/90-12	2.15x12	54J	TL	467/18.4	90/3.5	13
Scooter		CM502	R	120/70-12	3.50x12	51J	TL	473/18.6	119/4.7	13
Scooter		CM502	R	130/70-12	3.50x12	56J	TL	487/19.2	127/5.0	13
Scooter		CM502	R	130/60-13	3.50x13	53J	TL	486/19.1	129/5.1	13
Scooter		CM519	F/R	120/70-10	3.50x10	54L	TL	422/16.6	122/4.8	14
Scooter		CM519	F/R	120/80-10	2.75x10	62L	TL	446/17.6	119/4.7	14
Scooter		CM519	F/R	110/70-11	3.00x11	45L	TL	433/17.0	110/4.3	14
Scooter		CM519	F/R	120/70-11	3.50x11	50L/56L	TL	451/17.8	122/4.8	14
Scooter		CM519	F/R	120/70-12	3.50x12	51J	TL	473/18.6	122/4.8	14
Scooter		CM519	F/R	130/70-12	3.50x12	56J	TL	487/19.2	129/5.1	14
Scooter		CM519	F/R	130/60-13	3.50x13	53J	TL	486/19.1	129/5.1	14
Scooter		CM519	F/R	2.50-17	1.60x17	4PR	TT/TL	570/22.4	65/2.6	14
Scooter		CM519	F/R	2.75-17	1.85x17	4PR	TT/TL	588/23.1	75/3.0	14
Scooter		CM519	F/R	3.00-18	1.85x18	4PR	TT	627/24.7	80/3.1	14
Scooter		CM519	F/R	4.10-18	2.15x18	4PR	TT/TL	651/25.6	104/4.1	14
Scooter		CM519	F/R	110/90-16	2.50x16	59P	TL	607/23.9	109/4.3	14
Scooter		CM519	F/R	2.75-21	1.85x21	45P	TL	689/27.1	75/3.0	14
Scooter		CM568	F/R	3.00-10	2.15x10	4/6/8 PR	TL	413/16.3	80/3.1	14

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Scooter		CM568	F/R	3.50-10	2.50x10	4 PR	TL	437/17.2	92/3.6	14
Scooter		CM568	F/R	80/100-10	1.85x10	46C/52C	TL	414/16.3	80/3.1	14
Scooter		CM568	F/R	90/90-12	2.15x12	44J	TL	467/18.4	90/3.5	14
Scooter		CM568	F/R	100/90-10	2.50x10	56J	TL	434/17.1	101/4.0	14
Scooter		CM568	F/R	90/90-10	2.15x10	50J	TL	416/16.4	90/3.5	14
Scooter		C6011	F/R	3.00-10	2.15x10	6 PR	TL	409/16.1	80/3.1	15
Scooter		C6011	F/R	3.50-10	2.50x10	4/6/8 PR	TL	437/17.2	96/3.8	15
Scooter		C6011	F/R	4.00-10	2.50x10	4 PR	TT	466/18.3	105/4.1	15
Scooter		C6011	F/R	110/90-10	2.50x10	61J/66J	TL	452/17.8	109/4.3	15
Scooter		C6011	F/R	120/90-10	2.75x10	66J	TL	470/18.5	115/4.5	15
Scooter		C6011	F/R	130/90-10	3.00x10	70J	TL	488/19.2	129/5.1	15
Scooter		C6011	F/R	3.50-12	2.50x12	4/6 PR	TT/TL	488/19.2	97/3.8	15
Scooter		C6011	F/R	3.75-12	2.15x12	4/6 PR	TT	505/19.9	100/3.9	15
Scooter		C6011	F/R	4.00-12	2.50x12	4/6 PR	TT/TL	518/20.4	108/4.3	15
Scooter		C6011	F/R	110/90-12	2.50x12	64J/64M/69P	TL	510/20.1	109/4.3	15
Scooter		C6011	F/R	150/80-15(R)	3.50x15	76H	TL	621/24.4	151/5.9	15
Scooter		C6011	F/R	90/90-16	2.15x16	48H	TL	568/22.4	90/3.5	15
Scooter		C6011	F/R	110/90-16	2.50x16	59P/59S/59H/59V	TT/TL	604/23.8	109/4.3	15
Scooter		C6011	F/R	120/90-16	2.75x16	63H	TL	622/24.5	127/5.0	15
Scooter		C6011	F/R	130/80-16	3.00x16	64P	TL	614/24.2	129/5.1	15
Scooter		C6011	F/R	160/80-16	4.00x16	81H	TL	662/26.1	162/6.4	15
Scooter		C6011	F/R	130/70-17	3.50x17	62H	TL	624/24.6	129/5.1	15
Scooter		C6011	F/R	90/90-18	2.15x18	51H/51P	TL	619/24.4	90/3.5	15
Scooter		C6011	F/R	130/70-18	3.50x18	63H	TL	645/25.4	129/5.1	15
Scooter		C6011	F/R	140/70-18	3.75x18	67H	TL	661/26.0	139/5.5	15
Scooter		C6011	F/R	80/90-21	1.85x21	48H	TL	677/26.7	80/3.1	15
Scooter		C6011	F/R	90/90-21	2.15x21	54H	TL	695/27.4	92/3.6	15
Scooter		C6525F	F	110/90-13	2.50x13	56P	TL	528/20.8	109/4.3	16
Scooter		C6525F	F	120/70-13	3.50x13	53P/62P	TL	498/19.6	122/4.8	16
Scooter		C6525F	F	120/80-14(S)	2.75x14	58S	TL	548/21.6	119/4.7	16
Scooter		C6525	R	90/70-12	2.50x12	37J/43J	TL	430/16.9	90/3.5	16
Scooter		C6525	R	110/90-12	2.50x12	64P	TL	505/19.9	109/4.3	16
Scooter		C6525	R	110/70-13	3.00x13	55L	TL	484/19.1	110/4.3	16
Scooter		C6525	R	130/70-12	3.50x12	62P	TL	487/19.2	129/5.1	16
Scooter		C6525	R	130/70-13	3.50x13	63P	TL	512/20.2	129/5.1	16
Scooter		C6525	R	150/70-13	4.25x13	64S	TL	540/21.3	151/5.9	16
Scooter		C6525	R	120/80-14	2.75x14	58S	TL	548/21.6	119/4.7	16
Scooter		C6528F	F	3.50-10	2.50x10	59J	TL	434/17.1	92/3.6	17
Scooter		C6528F	F	110/70-12	3.00x12	53L	TL	459/18.1	110/4.3	17
Scooter		C6528F	F	110/80-14	2.50x14	53P	TL	532/20.9	109/4.3	17
Scooter		C6528F	F	120/70-16	3.50x16	57S	TL	574/22.6	122/4.8	17
Scooter		C6528F	F	80/90-15	1.85x15	51J	TL	528/20.8	80/3.1	17
Scooter		C6528	R	90/90-10	2.15x10	55J	TL	416/16.4	90/3.5	17

MOTO SCOOTER

TIRE INDEX

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Scooter		C6528	R	100/90-10	2.50x10	61J	TL	434/17.1	101/4.0	17
Scooter		C6528	R	120/70-12	3.50x12	58L	TL	473/18.6	122/4.8	17
Scooter		C6528	R	130/70-12	3.50x12	62L	TL	487/19.2	129/5.1	17
Scooter		C6528	R	80/80-14	1.85x14	43P	TL	484/19.1	80/3.1	17
Scooter		C6528	R	90/80-14	2.15x14	43P	TL	495/19.5	90/3.5	17
Scooter		C6528	R	100/80-14	2.50x14	48P/54J	TL	516/20.3	101/4.0	17
Scooter		C6528	R	140/70-15	3.75x15	69P	TL	577/22.8	139/5.5	17

MOTO ADVENTURE

TIRE INDEX

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Adventure Radial	RIDE AMBRO	CM-A1	F	90/90-21	2.15x21	54H	TL	695/27.4	90/3.5	21
Adventure Radial	RIDE AMBRO	CM-A1	F	100/80-17	2.50x17	52S	TL	592/23.3	101/4.0	21
Adventure Radial	RIDE AMBRO	CM-A1	F	110/80-18	2.50x18	58S	TL	634/25.0	109/4.3	21
Adventure Radial	RIDE AMBRO	CM-A1	F	110/80R19	2.50x19	59V	TL	659/25.9	109/4.3	21
Adventure Radial	RIDE AMBRO	CM-A1	F	120/70R19	3.50x19	60V	TL	651/25.6	122/4.8	21
Adventure Radial	RIDE AMBRO	CM-A1	F	120/70ZR17	3.50x17	(58W)	TL	601/23.7	122/4.8	21
Adventure Radial	RIDE AMBRO	CM-A1	R	130/70-17	3.50x17	62S	TL	614/24.2	129/5.1	21
Adventure Radial	RIDE AMBRO	CM-A1	R	160/60-17	4.50x17	69S	TL	626/24.6	161/6.3	21
Adventure Radial	RIDE AMBRO	CM-A1	R	150/70R17	4.25x17	69V	TL	644/25.4	151/5.94	21
Adventure Radial	RIDE AMBRO	CM-A1	R	170/60R17	4.50x17	72V	TL	636/25.0	168/6.6	21
Adventure Radial	RIDE AMBRO	CM-A1	R	160/60ZR17	4.50x17	(69W)	TL	624/24.6	161/6.3	21
Adventure Radial	RIDE AMBRO	CM-A1	R	180/55ZR17	5.50x17	(73W)	TL	634/25.0	178/7.0	21
Adventure Radial	RIDE AMBRO	CM-A5	F	110/80R19	2.50x19	59T	TL	662/26.1	109/4.3	23
Adventure Radial	RIDE AMBRO	CM-A5	F	120/70R19	3.50x19	60T	TL	651/25.6	122/4.8	23
Adventure Radial	RIDE AMBRO	CM-A5	R	150/70R17	4.25x17	69T	TL	646/25.4	151/5.94	23
Adventure Radial	RIDE AMBRO	CM-A5	R	170/60R17	4.50x17	72T	TL	636/25.0	168/6.6	23
Adventure Radial	RIDE AMBRO	CM-A5	R	150/70R18	4.25x18	70T	TL	672/26.5	151/5.94	23
Adventure Radial	RIDE AMBRO	CM-A3	F	90/90-21	2.15x21	54H	TL	700/27.6	90/3.5	22
Adventure Radial	RIDE AMBRO	CM-A3	F	110/80R19	2.50x19	59V	TL	659/25.9	109/4.3	22
Adventure Radial	RIDE AMBRO	CM-A3	F	120/70R19	3.50x19	60V	TL	652/25.7	122/4.8	22
Adventure Radial	RIDE AMBRO	CM-A3	F	120/70R17	3.50x17	58H	TL	601/23.7	122/4.8	22
Adventure Radial	RIDE AMBRO	CM-A3	R	150/70R17	4.25x17	69V	TL	642/25.3	151/5.94	22
Adventure Radial	RIDE AMBRO	CM-A3	R	160/60R17	4.50x17	69H	TL	628/24.7	161/6.3	22
Adventure Radial	RIDE AMBRO	CM-A3	R	170/60R17	4.50x17	72V	TL	636/25.0	168/6.6	22
Adventure Radial	RIDE AMBRO	CM-A3	R	150/70R18	4.25x18	70V	TL	667/26.3	151/5.94	22
Adventure Radial	RIDE AMBRO	CM-A4	F	90/90-21	2.15x21	54H	TL	700/27.6	90/3.54	22
Adventure Radial	RIDE AMBRO	CM-A4	R	150/70R18	4.25x18	70H	TL	667/26.3	151/5.94	22
Adventure Radial		CM509	F	90/90R17	2.15x17	49S	TL	594/23.4	90/3.5	23
Adventure Radial		CM509	F	110/70R17	3.00x17	54S	TL	586/23.1	110/4.3	23
Adventure Radial		CM509	F	120/70R17	3.50x17	58H	TL	600/23.7	122/4.8	23
Adventure Radial		CM509	F	110/80R18	2.50x18	58H	TL	633/25.0	109/4.3	23
Adventure Radial		CM509	F	110/80R19	2.50x19	59V	TL	659/26.0	109/4.3	23

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Adventure Radial		CM509	F	90/90-21	2.15x21	54H	TL	695/27.4	903.5	23
Adventure Radial		CM509	R	130/60R17	3.50x17	59S	TL	588/23.2	129/5.1	23
Adventure Radial		CM509	R	140/80R17	3.50x17	69H	TL	656/25.9	142/5.6	23
Adventure Radial		CM509	R	150/55R17	4.50x17	64S	TL	598/23.6	148/5.8	23
Adventure Radial		CM509	R	150/70R17	4.25x17	69V	TL	642/25.3	151/5.9	23
Adventure Radial		CM509	R	160/60R17	4.50x17	69H	TL	624/24.6	161/6.3	23
Adventure Radial		CM509	R	180/55R17	5.50x17	73H	TL	630/24.9	178/7.0	23
Classic Trail		CM-AD01	F	110/70-17	3.00x17	54S	TL	586/23.1	110/4.3	24
Classic Trail		CM-AD01	F	100/80-17	2.50x17	52S	TL	592/23.3	101/4.0	24
Classic Trail		CM-AD01	F	110/80-17	2.50x17	57S	TL	608/24.0	109/4.3	24
Classic Trail		CM-AD01	F	110/80-19	2.50x19	59S	TL	659/26.0	109/4.3	24
Classic Trail		CM-AD01	R	130/70-17	3.50x17	62S	TL	614/24.2	129/5.1	24
Classic Trail		CM-AD01	R	140/70-17	3.75x17	66S	TL	630/24.9	119/4.7	24
Classic Trail		CM-AD01	R	150/60-17	4.25x17	66S	TL	612/24.1	151/5.9	24
Classic Trail		CM-AD01	R	150/70-17	4.25x17	69S	TL	642/25.3	151/5.9	24
Classic Trail		CM-SC05	F	110/80-14	2.50x14	53P	TL	532/20.9	109/4.3	24
Classic Trail		CM-SC05	F	130/80-17	3.00x17	65S	TL	640/25.2	129/5.1	24
Classic Trail		CM-SC05	R	130/70-13	3.50x13	63P	TL	517/20.4	129/5.1	24
Classic Trail		CM-SC05	R	160/70-17	4.50x17	73S	TL	659/25.9	161/6.3	24
Trail Bike		C858	F/R	3.50-18	2.15x18	4/6 PR	TT	648/25.5	96/3.8	25
Trail Bike		C858	F/R	4.10-18 (S)	2.15x18	4/6 PR	TT	639/25.2	101/4.0	25
Trail Bike		C858	F/R	2.75-21	1.85x21	4 PR	TT	697/27.4	80/3.1	25
Trail Bike		C7201	F/R	3.50-16	2.15x16	4/6 PR	TT/TL	598/23.5	93/3.7	25
Trail Bike		C7201	F/R	110/90-16	2.50x16	59P	TT/TL	604/23.8	114/4.5	25
Trail Bike		C7201	F/R	2.75-17	1.85x17	4/6 PR	TT	590/23.2	75/3.0	25
Trail Bike		C7201	F/R	3.00-17	1.85x17	45P/4/6 PR	TT	602/23.7	80/3.1	25
Trail Bike		C7201	F/R	3.50-17	2.15x17	4 PR/54P	TT/TL	624/24.6	93/3.7	25
Trail Bike		C7201	F/R	3.00-18	1.85x18	4/6/8 PR	TT/TL	627/24.7	80/3.1	25
Trail Bike		C7201	F/R	3.25-18	2.15x18	4 PR	TT	637/25.1	89/3.5	25
Trail Bike		C7201	F/R	4.10-18	2.15x18	6 PR	TT	639/25.2	114/4.5	25
Trail Bike		C7201	F/R	90/90-18	2.15x18	6 PR	TT	619/24.4	90/3.5	25
Trail Bike		C7201	F/R	2.75-21	1.85x21	6 PR	TT	689/27.1	80/3.1	25
Trail Bike		C186	F/R	2.75-14	1.85x14	4/6 PR	TT	512/20.2	75/2.95	26
Trail Bike		C186	F/R	3.00-16	1.85x16	4 PR	TT	576/22.7	80/3.1	26
Trail Bike		C186	F/R	3.50-16	2.15x16	4 PR	TT/TL	598/23.5	93/3.7	26
Trail Bike		C186	F/R	110/90-16	2.50x16	65P	TT/TL	606/23.9	109/4.3	26
Trail Bike		C186	F/R	3.00-17	1.85x17	4 PR	TT	602/23.7	80/3.1	26
Trail Bike		C186	F/R	2.75-18	1.85x18	4 PR	TT	613/24.1	75/3.0	26
Trail Bike		C186	F/R	3.25-18	2.15x18	4 PR	TT	639/25.2	89/3.5	26
Trail Bike		C186	F/R	3.00-18	1.85x18	4/6 PR	TT	630/24.8	80/3.1	26
Trail Bike		C186	F/R	3.50-18	2.15x18	4 PR	TT	654/25.7	93/3.7	26
Trail Bike		C186	F/R	2.75-19	1.85x19	4 PR	TT	639/25.2	75/3.0	26

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Racing	RIDE MIGRA	CM-S5	F	110/70R17	3.00 x 17	54H	TL	586/23.1	110/4.3	30
Racing	RIDE MIGRA	CM-S5	F	120/70ZR17	3.50 x 17	58W	TL	601/23.7	122/4.8	30
Racing	RIDE MIGRA	CM-S5	R	140/70R17	3.75 x 17	66H	TL	628/24.7	139/5.5	30
Racing	RIDE MIGRA	CM-S5	R	150/60R17	4.25 x 17	66H	TL	613/24.1	151/5.9	30
Racing	RIDE MIGRA	CM-S5	R	160/60ZR17	4.50 x 17	69W	TL	626/24.6	161/6.3	30
Racing	RIDE MIGRA	CM-S5	R	180/55ZR17	5.50 x 17	73W	TL	634/25.0	178/7.0	30
Racing	RIDE MIGRA	CM-S5	R	190/55ZR17	6.00 x 17	75W	TL	646/25.4	190/7.5	30
Racing		CM-SR	F/R	3.00-10	2.15x10	42P	TL	413/16.3	80/3.1	31
Racing		CM-SR	F/R	80/90-10	2.15x10	44L	TL	402/15.8	82/ 3.2	31
Racing		CM-SR	F	3.50-10	2.50x10	51J	TL	440/17.3	92/3.6	31
Racing		CM-SR	F	100/90-12	2.50x12	49J	TL	485/19.1	101/4.0	31
Racing		CM-SR	F	100/80-14	2.50x14	48L	TL	500/19.7	119/4.7	31
Racing		CM-SR	F	90/80-17	2.15x17	46S	TL	578/22.8	92/3.6	31
Racing		CM-SR	R	100/90-10	2.50x10	56J	TL	437/17.2	101/4.0	31
Racing		CM-SR	R	120/80-12	2.75x12	55J	TL	500/19.7	119/4.7	31
Racing		CM-SR	R	110/70-13	3.00x13	55L	TL	484/19.1	110/4.3	31
Racing		CM-SR	R	130/70-17	3.50x17	62S	TL	614/24.2	129/5.1	31
Racing		CM-SR	F/R	70/90-17	1.60x17	38P	TL	558/22.0	69/2.7	31
Racing		CM-SR1	F	90/80R17	2.15x17	46H	TL	576/22.7	90/3.5	31
Racing		CM-SR2	R	110/70R17	3.00x17	54H	TL	586/23.1	110/4.3	31
Racing		CM-SR01F	F	100/70R17	2.75x17	49H	TL	580/22.9	97/3.8	32
Racing		CM-SR01F	F	110/70R17	3.00x17	54H	TL	590/23.3	104/4.1	32
Racing		CM-SR01F	F	120/70R17	3.50x17	58W	TL	603/23.3	119/4.7	32
Racing		CM-SR01R	R	120/70R17	3.50x17	58H	TL	600/23.7	119/4.7	32
Racing		CM-SR01R	R	140/70R17	3.75x17	66H	TL	628/24.8	138/5.4	32
Racing		CM-SR01R	R	190/60R17	5.50x17	78W	TL	658/25.9	190/7.5	32
Racing		CM-SR10	F	100/70R17(F)	2.75x17	49H	TL	582/22.9	95/3.74	32
Racing		CM-SR10	F	110/70R17	3.00x17	54H	TL	590/23.2	104/4.1	32
Racing		CM-SR10	F	120/70ZR17	3.50x17	(58W)	TL	603/23.7	119/4.69	32
Racing		CM-SR10	R	120/70R17(R)	3.50x17	58H	TL	600/23.6	117/4.61	32
Racing		CM-SR10	R	140/70R17	3.75x17	66H	TL	628/24.8	138/5.4	32
Racing		CM-SR10	R	150/60R17	4.25x17	66H	TL	613/24.1	151/5.9	32
Racing		CM-SR10	R	160/60ZR17	4.50x17	(69W)	TL	624/24.6	161/6.3	32
Racing		CM-SR10	R	180/60ZR17	5.50x17	(75W)	TL	657/25.9	190/7.48	32
Racing		CM-SRR	F	100/90R12	2.50x12	49P	TL	493/19.4	101/4.0	33
Racing		CM-SRR	R	120/80R12	2.75x12	55P	TL	503/19.8	119/4.7	33
Racing		CM556	F	100/80-12	2.50 x 12	56J	TL	460/18.1	96/3.8	33
Racing		CM558	R	120/80-12	2.75x12	65J	TL	497/19.6	119/4.7	33
Racing		C6109	F	100/80-12	2.50x12	56J	TL	465/18.3	101/4.0	34
Racing		C6109	R	120/80-12	2.75x12	65J	TL	497/19.6	119/4.7	34
Sports Touring Radial	RIDE MIGRA	CM-S1	F	110/70R17	3.00x17	54H	TL	586/23.1	110/4.3	34
Sports Touring Radial	RIDE MIGRA	CM-S1	F	120/70ZR17	3.50x17	58W	TL	600/23.7	122/4.8	34
Sports Touring Radial	RIDE MIGRA	CM-S1	R	140/60R17	3.75x17	63H	TL	600/23.7	139/5.5	34

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Sports Touring Radial	RIDE MIGRA	CM-S1	R	140/70R17	3.75x17	66H	TL	628/24.8	139/5.5	34
Sports Touring Radial	RIDE MIGRA	CM-S1	R	150/60R17	4.25x17	66H	TL	612/24.1	151/5.9	34
Sports Touring Radial	RIDE MIGRA	CM-S1	R	160/60ZR17	4.50x17	69W	TL	624/24.6	161/6.3	34
Sports Touring Radial	RIDE MIGRA	CM-S1	R	180/55ZR17	5.50x17	73W	TL	630/24.9	178/7.0	34
Sports Touring Radial	RIDE MIGRA	CM-S1	R	190/50ZR17	6.00x17	73W	TL	622/24.5	190/7.5	34
Sports Touring Radial	RIDE MIGRA	CM-S1	R	190/55ZR17	6.00x17	75W	TL	642/25.3	190/7.5	34
Sports Touring Radial	RIDE MIGRA	CM-S1	R	200/50ZR17	6.25x17	75W	TL	632/24.9	200/7.9	34
Sports Touring Radial		CM-DR	F	100/80R17	2.50x17	52H	TL	592/23.4	101/4.0	35
Sports Touring Radial		CM-DR	F	110/70R17	3.00x17	54H	TL	586/23.1	110/4.3	35
Sports Touring Radial		CM-DR	R	130/70R17	3.50x17	62H	TL	614/24.2	129/5.1	35
Sports Touring Radial		CM-DR	R	140/70R17	3.75x17	66H	TL	630/24.9	139/5.5	35
Sports Touring Radial		CM-DR	R	150/60R17	4.25x17	66H	TL	612/24.1	151/5.9	35
Sports Touring Radial		CM615	F	100/80R17	2.50x17	52H	TL	592/23.4	101/4.0	35
Sports Touring Radial		CM615	F	110/70R17	3.00x17	54H	TL	586/23.1	110/4.3	35
Sports Touring Radial		CM615	F	120/70R17	3.50x17	58H	TL	600/23.7	122/4.8	35
Sports Touring Radial		CM616	R	130/70R17	3.50x17	62H	TL	614/24.2	129/5.1	35
Sports Touring Radial		CM616	R	140/70R17	3.75x17	66H	TL	628/24.8	139/5.5	35
Sports Touring Radial		CM616	R	150/60R17	4.25x17	66H	TL	616/24.3	149/5.9	35
Sports Touring Radial		CM616	R	160/60R17	4.50x17	69H	TL	624/24.6	161/6.3	35
Sport Radial	RIDE MIGRA	CM-S3N	F	110/70R17	3.00x17	54H	TL	587/23.1	110/4.3	36
Sport Radial	RIDE MIGRA	CM-S3N	F	120/70ZR17	3.50x17	(58W)	TL	601/23.7	122/4.8	36
Sport Radial	RIDE MIGRA	CM-S3N	R	140/70R17	3.75x17	66H	TL	628/24.7	139/5.5	36
Sport Radial	RIDE MIGRA	CM-S3N	R	150/60R17	4.25x17	66H	TL	613/24.1	151/5.9	36
Sport Radial	RIDE MIGRA	CM-S3N	R	160/60ZR17	4.50x17	(69W)	TL	624/24.6	161/6.3	36
Sport Radial	RIDE MIGRA	CM-S3N	R	180/55ZR17	5.50x17	(73W)	TL	632/24.9	178/7.0	36
Sport Radial	RIDE MIGRA	CM-S3N	R	190/55ZR17	6.00x17	(75W)	TL	646/25.4	190/7.5	36
Sport Radial	RIDE MIGRA	CM-S3N	R	200/55ZR17	6.25x17	(78W)	TL	652/25.7	200/7.9	36
Sport Radial	ADRENO SPORT	CM-AS5	F	110/70R17	3.00x17	54H	TL	586/23.1	110/4.3	37
Sport Radial	ADRENO SPORT	CM-AS5	F	120/70ZR17	3.50x17	58W	TL	601/23.7	122/4.8	37
Sport Radial	ADRENO SPORT	CM-AS5	R	140/70R17	3.75x17	66H	TL	628/24.7	139/5.5	37
Sport Radial	ADRENO SPORT	CM-AS5	R	150/60R17	4.25x17	66H	TL	612/24.1	151/5.9	37
Sport Radial	ADRENO SPORT	CM-AS5	R	160/60ZR17	4.50x17	69W	TL	628/24.7	161/6.3	37
Sport Radial	ADRENO SPORT	CM-AS5	R	180/55ZR17	5.50x17	73W	TL	630/24.8	178/7.0	37
Sport Radial	ADRENO SPORT	CM-AS5	R	190/50ZR17	6.00x17	73W	TL	625/24.6	190/7.5	37
Cruiser Radial		C907Y	F	100/90-19	2.50x19	57H	TL	663/26.1	101/4.0	38

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Cruiser Radial		C907R	R	240/45R17	8.50x17	82H	TL	648/25.5	240/9.4	38
Cruiser Radial		CM-T1	F	130/70R18	3.50x18	63H	TL	640/25.2	129/5.1	38
Cruiser Radial		CM-T1	R	180/60R16	5.00x16	74H	TL	622/24.5	180/7.1	38
Cruiser Radial		CM-T1	R	200/55R16	6.25x16	77V	TL	626/24.6	200/7.9	38
Classic Street		CM-NK01	F	100/80-17	2.50x17	52S	TL	592/23.4	101/4.0	39
Classic Street		CM-NK01	F	110/70-17	3.00x17	54S	TL	586/23.1	110/4.3	39
Classic Street		CM-NK01	F	110/80-17	2.50x17	57S	TL	608/24.0	109/4.3	39
Classic Street		CM-NK01	F	120/70-17	3.50x17	58P	TL	600/23.6	122/4.8	39
Classic Street		CM-NK01	R	130/70-17	3.50x17	62S	TL	614/24.2	129/5.1	39
Classic Street		CM-NK01	R	140/70-17	3.75x17	66S	TL	630/24.9	119/4.7	39
Classic Street		CM-NK01	R	140/60-17	3.75x17	63S	TL	601/23.7	139/5.5	39
Classic Street		CM-NK01	R	150/60-17	4.25x17	66S	TL	612/24.1	151/5.9	39
Classic Street		CM-NK01	R	150/70-17	4.25x17	69P	TL	642/25.3	151/5.9	39
Classic Street		CM617	F	100/90-18	2.50x18	56P	TT	639/25.2	101/4.0	39
Classic Street		CM617	F	80/100-19	1.85x19	49P	TL	643/25.3	80/3.1	39
Classic Street		CM617	F	100/90-19	2.50x19	57S	TT	663/26.1	101/4.0	39
Classic Street		CM617	F	90/90-21	2.15x21	54P	TT	696/27.4	90/3.5	39
Classic Street		CM617	R	120/90-16	2.75x16	63P	TL	622/24.5	119/4.7	39
Classic Street		CM617	R	130/80-17	3.00x17	65P	TT	643/25.3	129/5.1	39
Classic Street		CM617	R	150/70-17	4.25x17	69S	TT	642/25.3	151/5.9	39
Classic Street		CM619	F	90/90-17	2.15x17	49S	TL	594/23.4	90/3.5	40
Classic Street		CM619	F	60/80-17	1.40x17	27P	TT	529/20.8	62/2.4	40
Classic Street		CM619	F	70/80-17	1.60x17	35P	TT	546/21.5	70/2.8	40
Classic Street		CM619	F	70/90-17	1.60x17	38P	TL	558/22.0	69/2.7	40
Classic Street		CM619	F	80/80-17	1.85x17	41P	TT	562/22.1	81/3.2	40
Classic Street		CM619	F	80/90-17	1.85x17	44S	TL	576/22.7	80/3.1	40
Classic Street		CM619	F	90/80-17	2.15x17	46P	TT	576/22.7	90/3.5	40
Classic Street		CM619	F	100/80-17	2.50x17	52P	TT	592/23.3	101/4.0	40
Classic Street		CM620	R	110/80-17	2.50x17	57S	TL	608/23.9	109/4.3	40
Classic Street		CM620	R	120/70-17	3.50x17	58P	TL	601/23.7	122/4.8	40
Classic Street		CM620	R	120/80-17	2.75x17	61S	TL	624/24.6	119/4.7	40
Classic Street		CM642	F/R	2.25-17	1.60x17	4PR	TT	556/21.9	61/2.4	41
Classic Street		CM642	F/R	2.50-17	1.60x17	6PR	TT	570/22.4	65/2.6	41
Classic Street		CM642	F/R	2.75-17	1.85x17	6PR	TT	588/23.1	75/3.0	41
Classic Street		CM642	F/R	2.50-18	1.60x18	6PR	TT	593/23.3	65/2.6	41
Classic Street		CM642	F/R	2.75-18	1.85x18	6PR	TT	613/24.1	75/3.0	41
Classic Street		CM642	F/R	70/90-17	1.60x17	38L	TL	558/22.0	69/2.7	41
Classic Street		CM642	F/R	80/90-17	1.85x17	50P	TL	576/22.7	80/3.1	41
Classic Street		CM647	F	2.75-17	1.85x17	4PR	TT	588/23.1	75/3.0	41
Classic Street		CM647	F	2.75-18	1.85x18	4PR	TT	613/24.1	75/3.0	41
Classic Street		CM-668X	F	120/80-16	2.75x16	60H	TL	600/23.6	119/4.7	42
Classic Street		CM-668X	F	120/80-18	2.75x18	62S	TL	649/25.6	119/4.7	42
Classic Street		CM668	R	150/80-15	3.50x15	70S	TL	625/24.6	150/5.9	42
Classic Street		CM668	R	140/70-16	3.75x16	65H	TL	604/23.8	139/5.5	42
Classic Street		CM668	R	170/60-17	4.50x17	72P	TL	636/25.0	168/6.6	42
Classic Street		CM669	F	130/90-16	3.00x16	67H	TL	640/25.2	129/5.1	42

MOTO STREET

TIRE INDEX

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
Classic Street		CM669	F	110/70-17	3.00x17	54S	TT	586/23.1	110/4.3	42
Classic Street		CM670	R	150/80-16	3.50x16	71H	TL	646/25.4	150/5.9	42
Classic Street		CM670	R	180/65-16	5.00x16	81S	TL	642/25.3	180/7.1	42
Classic Street		CM670	R	140/70-17	3.75x17	66S	TT	628/24.7	139/5.5	42
Classic Street		CM658	R	3.00-18	1.85x18	8PR	TT/TL	627/24.7	80/3.1	43
Classic Street		C6532	F/R	3.50-16	2.15x16	4/6 PR	TT/TL	598/23.5	93/3.7	43
Classic Street		C6532	F/R	2.50-17	1.60x17	4/6/8 PR	TT/TL	568/22.4	65/2.6	43
Classic Street		C6532	F/R	2.75-17	1.85x17	4/6 PR	TT/TL	588/23.1	78/3.1	43
Classic Street		C6532	F/R	2.75-18	1.85x18	4/6 PR	TT/TL	613/24.1	75/3.0	43
Classic Street		C6532	F/R	3.00-18	1.85x18	4/6/8 PR	TT/TL	627/24.7	80/3.1	43
Classic Street		C6532	F/R	3.00R18	1.85x18	8 PR	TT	627/24.7	80/3.1	43
Classic Street		C6532	F/R	3.25-18	2.15x18	4PR	TT/TL	639/25.2	89/3.5	43
Classic Street		C6532	F/R	90/90-18	2.15x18	51P	TT/TL	619/24.4	90/3.5	43
Classic Street		C6559F/Y	F	90/90-19	2.15x19	52P	TT/TL	645/25.4	90/3.5	44
Classic Street		C6559	R	130/60-13	3.50x13	53J	TL	486/19.1	129/5.1	44
Classic Street		C6559	R	110/90-17	2.50x17	60P	TT/TL	630/24.8	109/4.3	44
Classic Street		C910	F	2.75-18	1.85x18	4 PR/42P	TT/TL	612/24.1	76/3.0	45
Classic Street		C910	F	80/100-18	1.85x18	47P	TT/TL	617/24.3	80/3.1	45
Classic Street		C919	F/R	80/90-14	1.85x14	40P/46P	TL	500/19.7	84/3.3	45
Classic Street		C919	F/R	2.25-17	1.60x17	4PR	TT	556/21.9	60/2.4	45
Classic Street		C919	F/R	2.50-17	1.60x17	4PR	TT	568/22.4	65/2.6	45
Classic Street		C919	F/R	2.75-17	1.85x17	4PR	TT/TL	588/23.1	75/3.0	45
Classic Street		C919	F/R	2.50-18	1.60x18	4PR	TT	593/23.3	65/2.6	45
Classic Street		C919	F/R	2.75-18	1.85x18	4PR	TT/TL	613/24.1	80/3.1	45
Classic Street		C919	F/R	3.00-18	1.85x18	4PR	TT	627/24.7	80/3.1	45

MOTO OFF-ROAD

TIRE INDEX

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
MX	BITE MX	CM733	F	80/100-21	1.85x21	51M	TT	706/27.8	92/3.5	48
MX	BITE MX	CM734	R	100/90-18	2.50x18	56M	TT	650/25.6	118/4.6	48
MX	BITE MX	CM734	R	110/90-18	2.50x18	61M	TT	668/26.3	129/5.1	48
MX	BITE MX	CM734	R	100/90-19	2.50x19	57M	TT	687/27.0	120/4.7	48
MX	BITE MX	CM734	R	110/90-19	2.50x19	62M	TT	691/27.3	129/5.08	48
MX	LEGION MX-VI	CM702	F	60/100-14	1.40x14	29M	TT	482/19.0	69/2.7	49
MX	LEGION MX-VI	CM702	F	70/100-17	1.60x17	40M	TT	579/22.8	77/3.0	49
MX	LEGION MX-VI	CM702	F	70/100-19	1.60x19	42M	TT	630/24.8	82/3.2	49
MX	LEGION MX-VI	CM702	F	80/100-21	1.85x21	51M	TT	714/28.0	95/3.7	49
MX	LEGION MX-VI	CM702	F	90/100-21	2.15x21	57M	TT	722/28.4	102/4.0	49
MX	LEGION MX-VI	CM703	R	80/100-12	1.85x12	47M	TT	473/18.6	80/3.1	49
MX	LEGION MX-VI	CM703	R	90/100-14	2.15x14	49M	TT	545/21.5	100/3.9	49
MX	LEGION MX-VI	CM703	R	90/100-16	2.15x16	50M	TT	595/23.4	103/4.1	49
MX	LEGION MX-VI	CM703	R	100/100-18	2.50x18	59M	TT	667/26.3	117/4.6	49
MX	LEGION MX-VI	CM703	R	110/100-18	2.50x18	64M	TT	684/26.9	130/5.1	49

Class	Name	Pattern	Type	Tire Size	Rim Size	LSR	TT/TL	Diameter (mm/in)	Section Width (mm/in)	Page
MX	LEGION MX-VI	CM703	R	120/100-18	2.75x18	68M	TT	716/28.2	136/5.4	49
MX	LEGION MX-VI	CM703	R	100/90-19	2.50x19	57M	TT	663/26.1	105/4.1	49
MX	LEGION MX-VI	CM703	R	110/80-19	2.50x19	59M	TT	668/26.3	113/4.4	49
MX	LEGION MX-VI	CM703	R	110/90-19	2.50x19	62M	TT	693/27.3	133/5.2	49
MX	LEGION MX-VI	CM703	R	120/80-19	2.75x19	63M	TT	678/26.7	119/4.7	49
MX	LEGION MX-VI	CM703	R	120/90-19	2.75x19	66M	TT	717/28.2	136/5.4	49
MX	LEGION TRIALS	CM711	F	2.75-21	1.85x21	4 PR	TT	705/27.8	80/3.1	50
MX	LEGION TRIALS	CM712	R	4.00R18	2.15x18	4 PR	TL	700/27.6	103/4.1	50
MX		CM713	F	70/100-19	1.60x19	42M	TT	629/24.8	69/2.7	50
MX		CM713	R	80/100-19	1.85x19	49M	TT	649/25.6	80/3.1	50
MX	LEGION DESERT	CM715	F	80/100-21	1.85x21	51M	TT	710/28.0	90/3.5	51
MX	LEGION DESERT	CM716	R	110/100-18	2.50x18	64M	TT	685/27.0	130/5.1	51
MX	LEGION PRO S/I	CM736	F	80/100-21	1.85x21	51M	TT	706/27.8	94/3.7	51
MX	LEGION PRO S/I	CM737	R	110/90-19	2.50x19	62M	TT	659/25.9	129/5.1	51
MX	LEGION PRO I/H	CM738	F	80/100-21	1.85x21	51M	TT	706/27.8	94/3.7	52
MX	LEGION PRO I/H	CM739	R	100/90-18	2.50x18	56M	TT	652/25.7	120/4.7	52
MX	LEGION PRO I/H	CM739	R	110/90-18	2.50x18	61M	TT	665/26.2	129/5.1	52
MX	LEGION PRO I/H	CM739	R	100/90-19	2.50x19	57M	TT	679/26.7	120/4.7	52
MX	LEGION PRO I/H	CM739	R	110/90-19	2.50x19	62M	TT	659/25.9	129/5.1	52
MX		C7211	F	70/100-19	1.60x19	42M	TT	633/24.9	83/3.3	52
MX		C7211	F	80/100-21	1.85x21	51M	TT	704/27.7	92/3.6	52
MX		C7212	R	90/100-16	2.15x16	51M	TT	602/23.7	109/4.3	52
MX		C7212	R	100/90-18	2.50x18	62M	TT	653/25.7	120/4.7	52
MX		C7212	R	110/90-18	2.50x18	61M	TT	659/25.9	126/5.0	52
MX		C7212	R	100/90-19	2.50x19	63M	TT	687/27.0	120/4.7	52
MX		C7212	R	110/90-19	2.50x19	62M	TT	689/27.1	126/5.0	52
MX	SURGE I	C7209	F	70/100-19	1.60x19	42M	TT	635/25.0	83/3.3	53
MX	SURGE I	C7209	F	80/100-21	1.85x21	51M	TT	707/27.8	95/3.7	53
MX	SURGE I	C7210	R	90/100-16	2.15x16	51M	TT	602/23.7	109/4.3	53
MX	SURGE I	C7210	R	100/90-18	2.50x18	62M	TT	653/25.7	120/4.7	53
MX	SURGE I	C7210	R	110/90-18	2.50x18	61M	TT	659/25.9	126/5.0	53
MX	SURGE I	C7210	R	120/100-18	2.75x18	68M	TT	716/28.2	136/5.4	53
MX	SURGE I	C7210	R	100/90-19	2.50x19	63M	TT	687/27.0	120/4.7	53
MX	SURGE I	C7210	R	110/90-19	2.50x19	62M	TT	693/27.3	130/5.1	53
Sand	SURGE P	C7220	R	110/100-18	2.50x18	64M	TT	711/28.0	120/4.7	53
Sand	SURGE P	C7220	R	100/90-19	2.50x19	57M	TT	691/27.2	105/4.1	53
Sand	SURGE P	C7220	R	110/90-19	2.50x19	62M	TT	723/28.5	116/4.6	53
Enduro	BITE ENDURO	CM741	F	90/90-21	2.15x21	54M	TT	695/27.4	90/3.5	54
Enduro	BITE ENDURO	CM742	R	140/80-18	3.50x18	70M	TT	681/26.8	142/5.6	54
Enduro		CM-EX01	F	4.00-18	2.50x18	4PR	TT	668/26.3	108/4.3	55
Enduro		CM-EX01	F	90/90-21	2.15x21	54R/54M	TL	704/27.7	90/3.5	55
Enduro		CM-EX01	R	4.60-17	2.75x17	4PR	TT	644/25.4	117/4.6	55
Enduro		CM-EX01	R	140/80-18	3.50x18	70R/70M	TL	688/27.1	142/5.6	55
Enduro		CM-EX02F	F	90/90-21	1.60x21	54R	TT	704/27.7	94/3.7	55
Enduro		CM-EX02R	R	140/80-18	2.50x18	70R	TT	696/27.4	142/5.6	55



MOTORCYCLE TIRES

Cheng Shin Rubber (Xiamen) Ind., Ltd

15 Xi Bin Road, Xing Lin, Jimei District, Xiamen, China

T. + 86 592 6211606

F. + 86 592 6214649

www.xcs.com.cn

www.cstires.com

CST Rubber (Zhangzhou) Ind. Co., Ltd

15 Qingshi Road, Gangwei Town, Longhai District, Zhangzhou, China

T. + 86 596 6061111

F. + 86 596 6888766

Xiamen Cheng Shin Enterprise Co., Ltd

15 Xinchun Road, Haicang District, Xiamen, China

T. + 86 592 6809900

F. + 86 592 6809901

Cheng Shin Rubber (USA) Inc.

545 Old Peachtree Road, Suwanee, GA 30024, USA

T. 1-770-962-8229

F. 1-770-962-7705

www.cstires.com