



TRUCK/BUS RADIAL TIRE RANGE 2025-26
MIDDLE EAST & AFRICA

TBR

CHENG SHIN TIRE (XIAMEN) CO., LTD.
No. 15 Xiyuan Road, Haicang District, Xiamen, China
TEL: 86-592-6885333 FAX: 86-592-6537356


www.cst-tires.com



CST SPIRAL BOUND TECHNOLOGY


NORMAL

CR600 SPIRAL BOUND

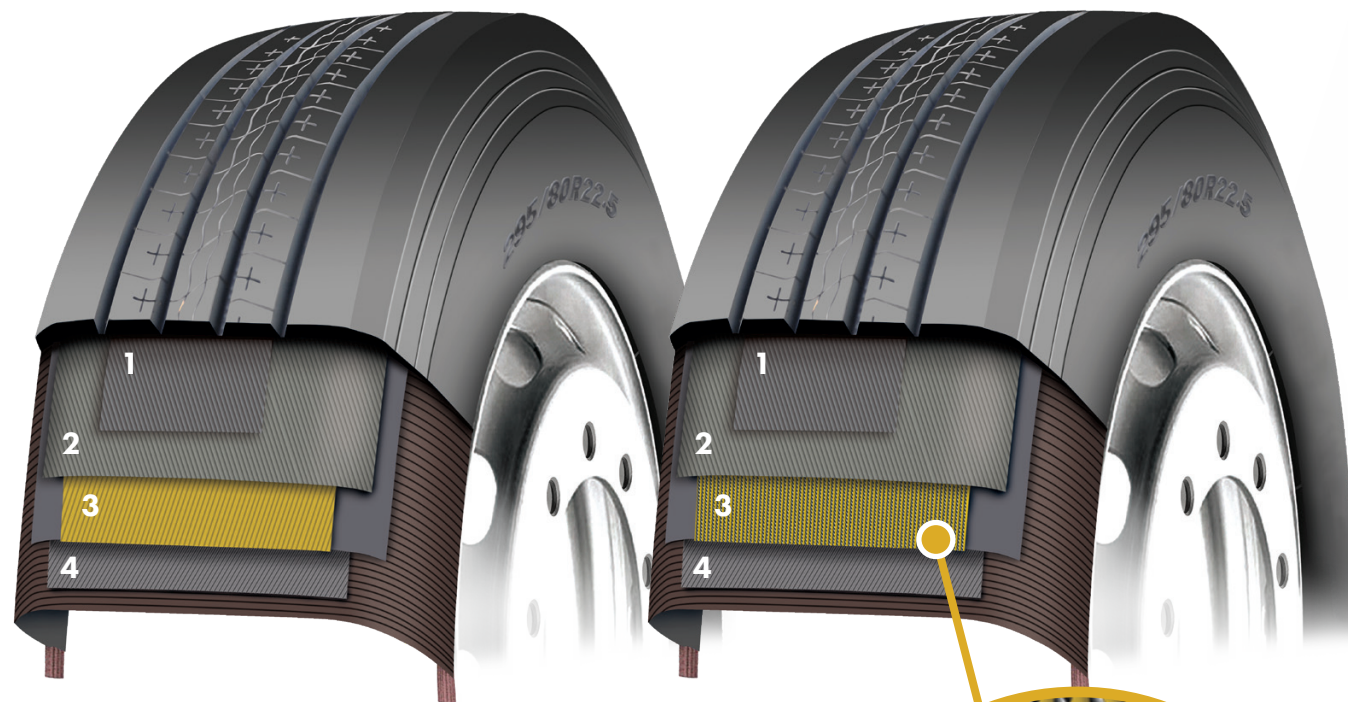

- Four steel belt layers provide strength and durability
- Special spiral bound steel belt technology on the third layer optimises road contact area and delivers longer mileage performance

*Spiral bound technology available on 295/60R22.5, 315/60R22.5, 315/70R22.5 sizes



R16

Size	Item No.	PR	Load/Speed	Pattern	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Max Pressure (kPa/psi)	Max Load (kg/lbs)	Rim
6.50R16	ETL00065800	12PR	110/105L TT/TL	CR182	750	189	9.8	(S) 670/97 (D) 670/97	(S) 1060/2335 (D) 925/2040	5.50
	ETL23721100	12PR	110/105K TT/TL	CR959	747	186	12.6	(S) 670/97 (D) 670/97	(S) 1060/2335 (D) 925/2040	5.50
7.00R16	ETL00311400	14PR	118/114M TT/TL	CR189II	776	196	10.5	(S) 770/112 (D) 770/112	(S) 1320/2910 (D) 1180/2600	5.50
	ETL00096400	14PR	118/114L TT/TL	CR969II	776	196	10.6	(S) 770/112 (D) 770/112	(S) 1320/2910 (D) 1180/2600	5.50
7.50R16	ETL00105500	16PR	125/121L TT/TL	CR182	804	215	11.5	(S)870/126 (D)870/126	(S)1650/3640 (D)1450/3195	6.00
	ETL00054000	16PR	125/121M TT	CR189II	808	216	11.4	(S)870/126 (D)870/126	(S)1650/3640 (D)1450/3195	6.00
	ETL00106300	16PR	125/121L TT/TL	CR192	805	209	12.6	(S)870/126 (D)870/126	(S)1650/3640 (D)1450/3195	6.00
	ETL00125500	16PR	125/121L TT	CR969II	813	214	14.2	(S)870/126 (D)870/126	(S)1650/3640 (D)1450/3195	6.00
	ETL00114500	16PR	125/121L TT/TL	CR997K	813	214	14.4	(S)870/126 (D)870/126	(S)1650/3640 (D)1450/3195	6.00
	ETL00129200	16PR	125/121L TL	CA190	806	214	12.5	(S)870/126 (D)870/126	(S)1650/3640 (D)1450/3195	6.00
	ETL00122200	16PR	125/121L TL	CA970	810	214	14.4	(S)870/126 (D)870/126	(S)1650/3640 (D)1450/3195	6.00
8.25R16	ETL00041200	18PR	132/128M TT	CR189II	858	233	11.9	(S) 870/126 (D) 870/126	(S) 2000/4410 (D) 1800/3970	6.50
	ETL00041300	18PR	132/128L TT	CR969II	868	233	14.7	(S) 870/126 (D) 870/126	(S) 2000/4410 (D) 1800/3970	6.50
	ETL00114000	18PR	132/128L TT	CR997K	868	233	14.8	(S) 870/126 (D) 870/126	(S) 2000/4410 (D) 1800/3970	6.50
	ETL00137600	18PR	132/128L TT	CR387K	863	232	15.8	(S)870/126 (D)870/126	(S)2000/4410 (D)1800/3970	6.50



R22.5



CA969 UT

ULTRA LOADING



CR939+SR

HEAVY LOADING



CR285SR



CR600

HIGH MILEAGE



CR600A

HIGH MILEAGE



CR297

SUPER SINGLE

EXTRA LOADING



CR969



CR939+



CR285



CR180

EXTRA LOADING

Size	Item No.	PR	Load/Speed	Pattern	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Max Pressure (kPa/psi)	Max Load (kg/lbs)	Rim
255/70R22.5	ETT00125200	18PR	143/140J TL	CR180	930	249	13.1	(S)900/130 (D)900/130	(S)2725/6005 (D)2500/5510	7.50
	ETT00129100	18PR	143/140J TL	CR969	930	250	16.0	(S)900/130 (D)900/130	(S)2725/6005 (D)2500/5510	7.50
11R22.5	ETT00008200	18PR	149/146M TL	CR285	1048	282	15.4	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	8.25
	ETT25154100	16PR	148/145K TL	CR969	1058	278	16.5	(S) 850/123 (D) 850/123	(S) 3150/6945 (D) 2900/6395	8.25
12R22.5	ETT00069500	18PR	152/149L TL	CR285	1083	296	15.8	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	9.00
	ETT00107300	18PR	152/149L TL	CR600A	1086	305	18.1	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	9.00
	ETT00051900	20PR	154/151L TL	CR285SR	1088	297	15.8	(S) 930/135 (D) 930/135	(S) 3750/8270 (D) 3450/7610	9.00
	ETT25033000	20PR	154/151K TL	CR939+SR	1084	296	18.0	(S) 930/135 (D) 930/135	(S) 3750/8270 (D) 3450/7610	9.00
	ETT00116100	20PR	154/151K TL	CA969 UT	1085	296	15.4	(S) 930/135 (D) 930/135	(S) 3750/8270 (D) 3450/7610	9.00
13R22.5	ETT00037800	20PR	156/153L TL	CR285SR	1121	319	15.7	(S) 930/135 (D) 930/135	(S) 4000/8820 (D) 3650/8050	9.75
	ETT00071200	20PR	156/153L TL	CR939+SR	1127	321	18.0	(S) 930/135 (D) 930/135	(S) 4000/8820 (D) 3650/8050	9.75
	ETT00118100	20PR	156/153K TL	CA969 UT	1120	312	15.4	(S) 930/135 (D) 930/135	(S) 4000/8820 (D) 3650/8050	9.75
295/60R22.5	ETT00105000	18PR	110/105L TL	CR600	926	288	14.6	(S) 900/130 (D) 900/130	(S) 3350/7390 (D) 3075/6780	9.00
315/60R22.5	ETT00104900	20PR	110/105K TL	CR600	947	317	13.7	(S) 900/130 (D) 900/130	(S) 3650/8050 (D) 3350/7390	9.75
315/70R22.5	ETT00105100	20PR	118/114M TL	CR600	1013	312	15.0	(S) 930/135 (D) 930/135	(S) 3750/8270 (D) 3450/7610	9.00
385/65R22.5	ETT25409200	20PR	160K TL	CR297	1073	378	17.8	(S) 900/130	(S) 4500/9920	11.75
425/65R22.5	ETT16981100	20PR	164K TL	CR297	1136	412	17.2	(S) 830/120	(S) 5000/11000	12.25
295/80R22.5	ETT25107010	16PR	152/149L TL	CR285	1053	307	16.3	(S) 850/123 (D) 850/123	(S) 3550/7825 (D) 3150/6945	9.00
	ETT00124600	18PR	152/149M TL	CR600	1049	296	17.8	(S) 900/130 (D) 900/130	(S) 3550/7830 (D) 3250/7160	9.00
315/80R22.5	ETT00113500	20PR	157/154L TL	CR600	1082	315	15	(S) 900/130 (D) 900/130	(S) 4125/9090 (D) 3750/8270	9.00
	ETT00053800	20PR	157/154L TL	CR939+	1078	314	17.6	(S) 900/130 (D) 900/130	(S) 4125/9090 (D) 3750/8270	9.00


Types of vehicle:

2 = STEER AXLE

D = DRIVE AXLE

T = TRAILER AXLE


2D




2DD



2DT



2DTT




2DDT




2DDD



2DDTT



2DTTT




2DDTTT




CST
TIRES

R17.5/R19.5



EXTRA LOADING

Size	Item No.	PR	Load/Speed	Pattern	Overall Diameter (mm)	Section Width (mm)	Tread depth (mm)	Max Pressure (kPa/psi)	Max Load (kg/lbs)	Rim
9.5R17.5	ETL36209300	18PR	143/141J TL	CR158	845	234	11.9	(S) 875/127 (D) 875/127	(S) 2725/6005 (D) 2575/5675	6.75
	ETT00086800	16PR	143/141K TL	CR836	844	233	16.0	(S) 875/127 (D) 875/127	(S) 2725/6005 (D) 2575/5675	6.75
	ETT00092400	18PR	143/141J TL	CR969	844	238	15.3	(S) 875/127 (D) 875/127	(S) 2725/6005 (D) 2575/5675	6.75
205/75R17.5	ETT00070800	16PR	125/123M TL	CR285	760	203	12.5	(S) 830/120 (D) 830/120	(S) 1650/3640 (D) 1550/3415	6.00
215/75R17.5	ETT00015100	16PR	135/133J TL	CR285	774	213	12.4	(S) 850/123 (D) 850/123	(S) 2180/4805 (D) 2060/4540	6.00
	ETT00082300	16PR	135/133J TL	CR170	772	212	12.5	(S) 850/123 (D) 850/123	(S) 2180/4805 (D) 2060/4540	6.00
235/75R17.5	ETT00015300	18PR	143/141J TL	CR285	807	236	13.5	(S) 875/127 (D) 875/127	(S) 2725/6005 (D) 2575/5675	6.75
	ETT00080000	16PR	143/141J TL	CR170	795	238	13.5	(S) 875/127 (D) 875/127	(S) 2725/6005 (D) 2575/5675	6.75
245/70R19.5	ETT00101500	18PR	141/140K TL	CR285	844	247	13.8	(S) 850/123 (D) 850/123	(S) 2575/5675 (D) 2500/5510	7.50
	ETT00085600	18PR	141/140J TL	CR170	843	245	14.1	(S) 850/123 (D) 850/123	(S) 2575/5675 (D) 2500/5510	7.50
265/70R19.5	ETT00080100	20PR	146/144L TL	CR285	875	263	14.1	(S) 900/130 (D) 900/130	(S) 3000/6610 (D) 2800/6175	7.50
	ETT00065300	18PR	143/141J TL	CR969	874	262	16.4	(S) 850/123 (D) 850/123	(S) 2725/6005 (D) 2575/5675	7.50
285/70R19.5	ETT00079900	18PR	150/148J TL	CR285	894	285	15.0	(S) 900/130 (D) 900/130	(S) 3350/7390 (D) 3150/6940	8.25




R24



HEAVY LOADING

Size	Item No.	PR	Load/Speed	Pattern	Overall Diameter (mm)	Section Width (mm)	Tread depth (mm)	Max Pressure (kPa/psi)	Max Load (kg/lbs)	Rim
12.00R24	ETT27007100	20PR	160/156F TT	CR307	1247	313	29.9	(S) 850/123 (D) 850/123	(S) 4500/9920 (D) 4000/8820	8.50
	ETT27006100	20PR	160/156K TT	CR969+	1224	312	16.5	(S) 850/123 (D) 850/123	(S) 4500/9920 (D) 4000/8820	8.50

R20



HEAVY LOADING



EXTRA LOADING



EXTRA LOADING

Size	Item No.	PR	Load/Speed	Pattern	Overall Diameter (mm)	Section Width (mm)	Tread depth (mm)	Max Pressure (kPa/psi)	Max Load (kg/lbs)	Rim
8.25R20	ETT07414000	16PR	139/137L TT	CR189II	976	234	12.3	(S) 930/135 (D) 930/135	(S) 2430/5355 (D) 2300/5070	6.50
	ETT00025600	16PR	139/137L TT	CR969+	976	236	14.6	(S) 930/135 (D) 930/135	(S) 2430/5355 (D) 2300/5070	6.50
	ETT07407300	16PR	139/137L TT	CR969K	977	236	14.6	(S) 930/135 (D) 930/135	(S) 2430/5355 (D) 2300/5070	6.50
9.00R20	ETT00068000	18PR	145/143K TT	CR285	1021	258	16.5	(S) 930/135 (D) 930/135	(S) 2900/6395 (D) 2725/6005	7.00
	ETT00013500	18PR	145/143K TT	CR939+	1019	253	15.8	(S) 930/135 (D) 930/135	(S) 2900/6395 (D) 2725/6005	7.00
	ETT07903000	18PR	145/143K TT	CR969K	1021	256	15.7	(S) 930/135 (D) 930/135	(S) 2900/6395 (D) 2725/6005	7.00
10.00R20	ETT10849100	18PR	149/146K TT	CR285	1052	282	15.2	(S) 930/135 (D) 930/135	(S) 2900/6395 (D) 2725/6005	7.50
	ETT00054700	16PR	146/143K TT	CR327	1068	280	20.7	(S) 830/120 (D) 830/120	(S) 3000/6615 (D) 2725/6005	7.50
	ETT00103000	18PR	149/146K TT	CR328K	1068	280	20.1	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	7.50
	ETT00124300	18PR	149/146K TT	CR387K	1056	280	17.2	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	7.50
	ETT10616000	18PR	149/146K TT	CR969+	1059	276	16.4	(S) 930/135 (D) 930/135	(S) 3250/7165 (D) 3000/6615	7.50
	ETT00100900	18PR	143/141J TL	CR969K	1059	277	15.8	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	7.50
	ETT00120800	18PR	152/149K TT	CR285+	1081	285	16.0	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00
	ETT16952100	16PR	150/147F TT	CR307	1093	292	23.3	(S) 830/120 (D) 830/120	(S) 3350/7390 (D) 3075/6780	8.00
11.00R20	ETT16959700	18PR	152/149F TT	CR337	1090	282	23.3	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00
	ETT16948200	18PR	152/149K TT	CR387	1084	285	18.0	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00
	ETT16943000	18PR	152/149K TT	CR969+	1089	295	15.8	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00
	ETT00051400	18PR	152/149K TT	CR989K	1085	294	15.7	(S) 930/135 (D) 930/135	(S) 3550/7830 (D) 3250/7160	8.00
	ETT17007310	20PR	156/153K TL	CR189	1117	313	15.0	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50
12.00R20	ETT00113100	20PR	156/153J TL	CR327	1130	317	20.7	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50
	ETT16965300	20PR	156/153F TL	CR337	1130	313	23.3	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50
	ETT00056500	20PR	156/153K TL	CR969+	1124	313	15.6	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50
	ETT00051500	18PR	156/153K TL	CR969K	1124	315	15.9	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50