


SAKURA®

2025-26 TBR TIRE RANGE
MIDDLE EAST & AFRICA

R16/R17.5



SAKURA®



SM932K

HEAVY LOADING



SM932 II



SM332



SR212 II PLUS

EXTRA LOADING




SR215

STANDARD LOADING


Item No.	Size	Pattern	PR	Load/Speed	TT/TL	Tread depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max Pressure (kPa/psi)	Max Load (kg/lbs)	Rim
ETL00056500	6.50R16LT	SM332	12PR	110/105K	TT/TL	12.6	748	190	(S) 670/97 (D) 670/97	(S) 1060/2335 (D) 925/2040	5.50
ETL00122900	7.00R16LT	SR212II PLUS	14PR	118/114M	TT/TL	12.6	778	196	(S) 770/112 (D) 770/112	(S) 1320/2910 (D) 1180/2600	5.50
ETL00122800	7.50R16LT	SR212II PLUS	16PR	125/121M	TT	13.4	809	219	(S) 870/126 (D) 870/126	(S) 1650/3640 (D) 1450/3195	6.00
ETL00154600	7.50R16LT	SM932II	14PR	122/118L	TT	14.5	811	214	(S) 770/112 (D) 770/112	(S) 1500/3305 (D) 1320/2910	6.00
ETL00054600	8.25R16LT	SR212IIS PLUS	18PR	132/128M	TT	11.9	860	233	(S) 870/126 (D) 870/126	(S) 2000/4410 (D) 1800/3970	6.50
ETL30603000	8.25R16LT	SM932II	18PR	132/128L	TT	14.9	865	233	(S) 870/126 (D) 870/126	(S) 2000/4410 (D) 1800/3970	6.50
ETL00113900	8.25R16LT	SM932K	18PR	132/128L	TT	14.9	865	233	(S) 870/126 (D) 870/126	(S) 2000/4410 (D) 1800/3970	6.50
ETT00128400	215/75R17.5	SR215	16PR	135/133J	TL	12.4	775	211	(S) 850/123 (D) 850/123	(S) 2180/4805 (D) 2060/4540	6.00
ETT00084800	235/75R17.5	SR215	16PR	143/141J	TL	13.5	804	240	(S) 875/127 (D) 875/127	(S) 2725/6005 (D) 2575/5675	6.75
ETT00111000	245/70R19.5	SR215	18PR	141/140K	TL	13.8	844	247	(S) 850/123 (D) 850/123	(S) 2575/5675 (D) 2500/5510	7.50

Types of vehicle: **2** = STEER AXLE **D** = DRIVE AXLE **T** = TRAILER AXLE


2D




2DD



2DTT




2DDTT

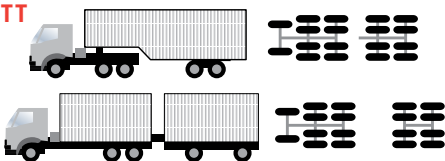

2DDTTT



R22.5



SAKURA®



SM601SR

HEAVY LOADING



SR225SR



CR297

EXTRA LOADING



SM601



SR235

EXTRA LOADING




SR266

HIGH MILEAGE

Item No.	Size	Pattern	PR	Load/Speed	TT/TL	Tread depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max Pressure (kPa/psi)	Max Load (kg/lbs)	Rim
ETT00112400	11R22.5	SR235	18PR	149/146M	TL	15.5	1053	282	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	8.25
ETT00112600	12R22.5	SR266	18PR	152/149L	TL	18.1	1086	304	(S) 930/135 (D) 930/135	(S) 3550/7825 (D) 3250/7165	9.00
ETT25024100	12R22.5	SM601SR	20PR	154/151K	TL	16.9	1088	295	(S) 930/135 (D) 930/135	(S) 3750/8270 (D) 3450/7610	9.00
ETT00051300	13R22.5	SR225SR	20PR	156/153L	TL	15.8	1117	312	(S) 930/135 (D) 930/135	(S) 4000/8820 (D) 3650/8050	9.75
ETT00033400	13R22.5	SM601SR	20PR	156/153K	TL	16.9	1124	319	(S) 930/135 (D) 930/135	(S) 4000/8820 (D) 3650/8050	9.75
ETT00105300	295/60R22.5	SR266	18PR	150/147L	TL	14.6	924	300	(S) 900/130 (D) 900/130	(S) 3350/7390 (D) 3075/6780	9.00
ETT00120000	295/80R22.5	SR266	18PR	152/149M	TL	17.8	1052	305	(S) 900/130 (D) 900/130	(S) 3550/7830 (D) 3250/7160	9.00
ETT00119100	315/80R22.5	SR266	20PR	157/154L	TL	15	1081	316	(S) 900/130 (D) 900/130	(S) 4125/9090 (D) 3750/8270	9.00
ETT00090600	315/80R22.5	SM601	20PR	157/154L	TL	17.6	1082	314	(S) 900/130 (D) 900/130	(S) 4125/9090 (D) 3750/8270	9.00
ETT00075700	425/65R22.5	CR297	20PR	164K	TL	17.2	1136	412	(S) 830/120	(S) 5000/11000	12.25

R20**SAKURA®****SA951K****SL357K****SL557K****HEAVY LOADING****SA951****SM606****SM902****EXTRA LOADING**

Item No.	Size	Pattern	PR	Load/Speed	TT/TL	Tread depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max Pressure (kPa/psi)	Max Load (kg/lbs)	Rim
ETT00083400	9.00R20	SM606	16PR	144/142K	TT	14.8	1021	253	(S) 900/130 (D) 900/130	(S) 2800/6175 (D) 2650/5840	7.00
ETT00083600	10.00R20	SM606	18PR	149/146K	TT	15.6	1058	278	(S) 930/135 (D) 930/135	(S) 3250/7160 (D) 3000/6610	7.50
ETT00119300	10.00R20	SA951K	18PR	149/146K	TT	16.2	1125	314	(S) 930/135 (D) 930/135	(S) 3250/7165 (D) 3000/6615	7.50
ETT00126100	12.00R20	SA951	20PR	156/153K	TT	13.8	1125	314	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50
ETT17006700	12.00R20	SM902	20PR	156/153K	TT	16.1	1124	315	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50
ETT00108400	12.00R20	SL357K	20PR	156/153K	TT	17.5	1125	312	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50
ETT00113300	12.00R20	SL557K	20PR	156/153K	TT	18.5	1130	318	(S) 900/130 (D) 900/130	(S) 4000/8820 (D) 3650/8050	8.50

2DD**SAKURA®**

SAKURA TIRES

Cheng Shin Tire (Xiamen) Co., Ltd,
No.15 Xiyuan Road, Haicang District,
Xiamen City, China
Tel: +86 592 6885333